


R-DPG-V Smooth collated nails with fuel cells and two type of valves in box - galvanized

Smooth shank galvanised nails for timber framing, roofing and other timber applications



Certificate

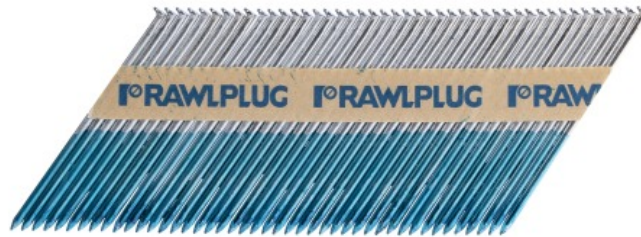

Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- [English]: łączenie taśmą plastikową
- Minimum of 12 microns zinc coating provides great corrosion protection
- Depending on the quantity of nails box contains 1,2 or 3 fuel cells

Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades

Base materials

- Timber
- Plywood
- Chipboard
- Wood



Product commercial data

Index	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box weight	Outer weight	EAN
	[mm]	[mm]						[pcs]	[pcs]	[pcs]	kg	kg	
R-DPG-2863-V	2.8	63	Clipped head	Smooth	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	11.57	11.57	59066754 64107
R-DPG-3163-V	3.1	63	Clipped head	Smooth	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	13.01	13.01	59066754 64114
R-DPG-3175-V	3.1	75	Clipped head	Smooth	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	2200	2	10.33	10.33	59066754 64138
R-DPG-3190-V	3.1	90	Clipped head	Smooth	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	2200	2	12.14	12.14	59066754 64145