

T-GP Ring shank nails

Ringed shank nails for connecting wooden construction elements and secure anchoring of wood connectors



Product information

Features and benefits

- Manufactured in accordance with DIN 68163K
- Made of low carbon cold drawn steel wire
- Ringed shank provides a strong hold in soft and medium density woods
- The threads on the shank separate the wood fibers, which then lock back into the rings causing greater removal resistance
- Flat head provides a large striking surface and solid holding power
- Checkered textured head to prevent slippage
- Diamond shaped sharp point for easy drive in of the nail
- Available in zinc electroplated version for enhanced corrosion resistance

Applications

- Applicable for general purposes
- Plywood, underlayment, decking, siding and roofing applications
- Wooden constructions
- Wooden cases, boxes, bins, coffers, lockers
- Anchoring of wood connection elements
- Wooden fences
- Wooden trunks stabilization
- Pergolas, bowers, sheds

Base materials


Approved for use in:

- Wood
- Timber

Also suitable for use in:


- Branches
- Chipboard
- Plywood
- Wood with metal

Installation guide

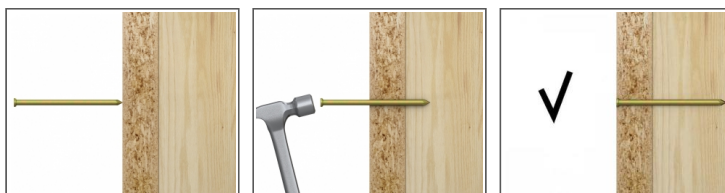

1. Choose the appropriate dimension and length of the nail
2. Set the fastened element in required place and position
3. Hammer in the nail until the head is flush
4. Use the necessary quantity of nails to fasten the element secure

Product information

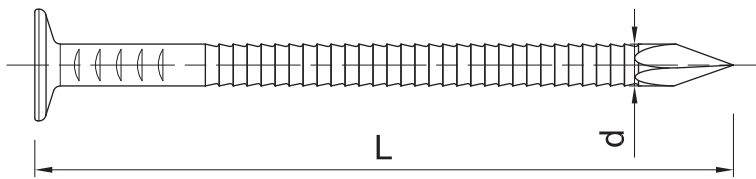

Product Code	Nail	
	Diameter	Length
	d	L
	[mm]	[mm]
T-GP-30050	3	50
T-GP-30060	3	60
T-GP-35070	3.5	70
T-GP-35080	3.5	80
T-GP-35090	3.5	90
T-GP-35100	3.5	100
T-GP-45125	4.5	125
T-GP-30050-OC	3	50
T-GP-30060-OC	3	60
T-GP-35070-OC	3.5	70
T-GP-35080-OC	3.5	80
T-GP-35090-OC	3.5	90
T-GP-35100-OC	3.5	100
T-GP-45125-OC	4.5	125

Product commercial data

Product Code	Nail		Quantity [pcs]			Weight [kg]			Bar Codes
	Diameter [mm]	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
T-GP-30050	3	50	5	5	800	5.1	5.1	843.8	5906675737270
T-GP-30060	3	60	5	5	800	5.1	5.1	842.8	5906675737379
T-GP-35070	3.5	70	5	5	450	5.0	5.0	481.4	5906675737478
T-GP-35080	3.5	80	5	5	800	5.1	5.1	844.2	5906675737577
T-GP-35090	3.5	90	5	5	800	5.0	5.0	830.0	5906675737676
T-GP-35100	3.5	100	5	5	800	5.1	5.1	843.0	5906675737775
T-GP-45125	4.5	125	5	5	800	5.1	5.1	841.4	5906675737874
T-GP-30050-OC	3	50	5	5	800	5.0	5.0	830.0	5906675791272
T-GP-30060-OC	3	60	5	5	800	5.1	5.1	845.7	5906675118666
T-GP-35070-OC	3.5	70	5	5	800	5.1	5.1	845.5	5906675118659
T-GP-35080-OC	3.5	80	5	5	800	5.1	5.1	843.4	5906675118673
T-GP-35090-OC	3.5	90	5	5	800	5.1	5.1	842.8	5906675118680
T-GP-35100-OC	3.5	100	5	5	300	5.1	5.1	333.4	5906675118697
T-GP-45125-OC	4.5	125	5	5	800	5.1	5.1	838.6	5906675118642