

R-KEX II with Rebars as an Anchor

Premium pure epoxy resin approved for use with reinforcement bars



Approvals and Reports

- ETA-21/0244
- UKTA-22/6132



Product information

Features and benefits

- The strongest resin in the epoxy resin class
- Approved for use in cracked and non-cracked concrete (EAD 330499-01-0601), working life up to 100 years
- Suitable for use in dry and wet substrates including flooded holes (use category I1 & I2)
- Diamond and hammer drilling
- Seismic category C1, C2
- Very high chemical resistance – suitable for applications exposed to influence of various agents (industrial or marine environment)
- Minimal shrinkage provides option of use in diamond-drilled holes and oversized holes
- Extended working time ensures easy installation of metal components (up to 30 min. in 20°C)
- For use in positive temperatures

Applications

- Safety barriers
- Temporary works/formworks support systems
- Rebar
- Curtain walling
- Formwork support systems
- Masonry support
- Platforms
- Structural steelwork
- Rebar dowelling
- Starter bars
- Rebar missed-outs

Base materials


Approved for use in:

- Non-cracked concrete C20/25-C50/60
- Cracked concrete C20/25-C50/60

Also suitable for use in:

- High-Density Natural Stone

Installation guide

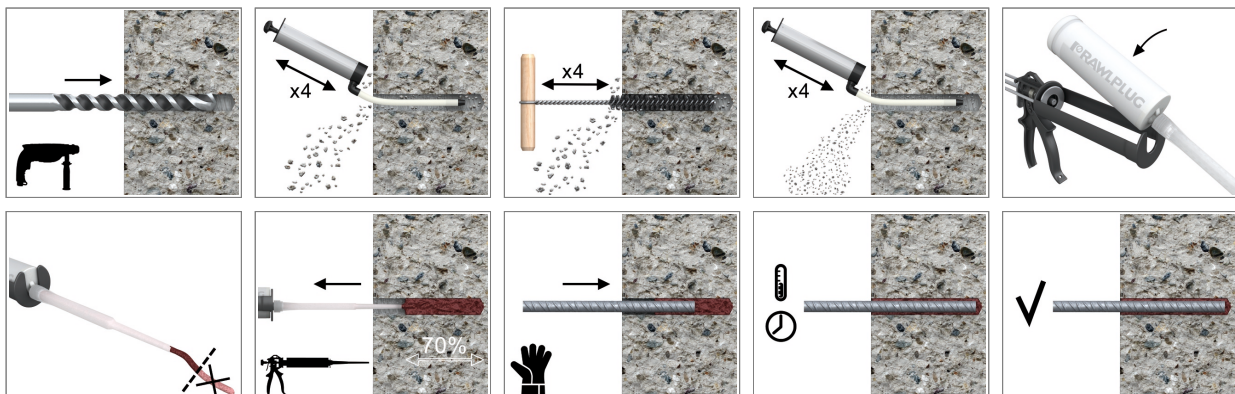


Product information

1. Drill hole to the required diameter and depth for rebar size being used.
2. Clean the hole with brush and hand pump at least four times each. It is very important and necessary before installation.
3. Insert cartridge into gun and attach nozzle.
4. Dispense to waste until even colour is obtained.
5. Insert the mixer nozzle to the bottom of the drill hole and inject resin, slowly withdrawing the nozzle as the hole is filled to 70% of its depth.
6. Immediately insert the rebar, slowly and with slight twisting motion. Remove any excess resin around the hole before it sets and leave it undisturbed until the curing time elapses.

Product Code	Resin	Description / Resin Type	Volume
			[ml]
R-KEX-II-385	R-KEX II	Epoxy Resin	385
R-KEX-II-600			600

Installation data

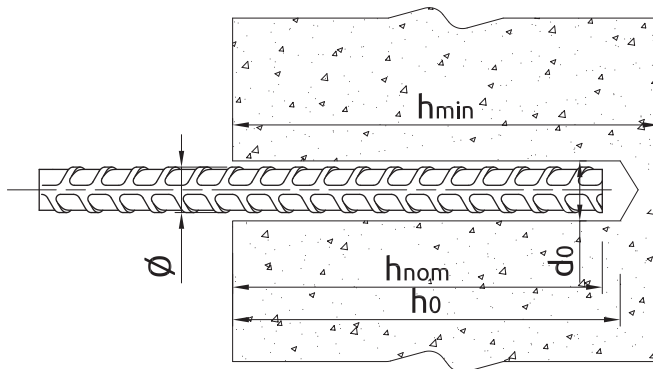

REBARS AS ANCHORS

Size		Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
Rebar diameter	d_s [mm]	8	10	12	14	16	20	25	32
Hole diameter in substrate	d_0 [mm]	12	14	18	18	22	26	32	40
Min. hole depth in substrate	h_0 [mm]	$h_{nom}+5$	$h_{nom}+5$	$h_{nom}+5$	$h_{nom}+5$	$h_{nom}+5$	$h_{nom}+5$	$h_{nom}+5$	$h_{nom}+5$
Min. substrate thickness	h_{min} [mm]	$h_{nom}+30$ ≥ 100	$h_{nom}+30$ ≥ 100	$h_{nom}+30$ ≥ 100	$h_{nom}+30$ ≥ 100	$h_{nom}+2d_0$	$h_{nom}+2d_0$	$h_{nom}+2d_0$	$h_{nom}+2d_0$
Min. spacing	s_{min} [mm]	40	40	40	40	50	60	70	85
Min. edge distance	c_{min} [mm]	40	40	40	40	50	60	70	85
MINIMUM EMBEDMENT DEPTH									
Min. installation depth	$h_{nom,min}$ [mm]	60	70	80	80	100	120	140	165
MAXIMUM EMBEDMENT DEPTH									
Min. installation depth	$h_{nom,max}$ [mm]	160	200	240	280	320	400	500	640

Minimum working and curing time

Resin temperature	Concrete temperature	Curing time*	Working time
[°C]	[°C]	[min]	[min]
5	5	2880	150
10	10	1080	120
20	20	480	35
25	30	300	12

*For wet concrete the curing time must be doubled

Mechanical properties

REBARS AS ANCHORS

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
f_{uk} = 540 (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)										
Nominal ultimate tensile strength - tension	f _{uk}	[N/mm ²]	540	540	540	540	540	540	540	540
Nominal yield strength - tension	f _{yk}	[N/mm ²]	500	500	500	500	500	500	500	500
Cross sectional area - tension	A _s	[mm ²]	50	79	113	154	201	314	491	804
Elastic section modulus	W _{el}	[mm ³]	50	98	170	269	402	785	1534	3217
f_{uk} = 575 (e.g. B 500 SP acc. to EC2)										
Nominal ultimate tensile strength - tension	f _{uk}	[N/mm ²]	575	575	575	575	575	575	575	575
Nominal yield strength - tension	f _{yk}	[N/mm ²]	500	500	500	500	500	500	500	500
Cross sectional area - tension	A _s	[mm ²]	50	79	113	154	201	314	491	804
Elastic section modulus	W _{el}	[mm ³]	50	98	170	269	402	785	1534	3217
f_{uk} = 620 (e.g. G-60 acc. to ASTM 615)										
Nominal ultimate tensile strength - tension	f _{uk}	[N/mm ²]	620	620	620	620	620	620	620	620
Nominal yield strength - tension	f _{yk}	[N/mm ²]	420	420	420	420	420	420	420	420
Cross sectional area - tension	A _s	[mm ²]	50	79	113	154	201	314	491	804
Elastic section modulus	W _{el}	[mm ³]	50	98	170	269	402	785	1534	3217

Basic performance data

REBARS AS ANCHORS

Size		Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32	Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
Substrate		Non-cracked concrete								Cracked concrete							
MEAN ULTIMATE LOAD																	
TENSION LOAD $N_{Ru,m}$																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	24.7	34.0	43.3	45.7	67.5	88.7	111.8	143.1	18.7	27.8	34.0	34.0	47.5	62.4	78.7	100.7
Maximum embedment depth	[kN]	28.5	44.5	61.1	87.3	114.0	178.1	278.3	456.0	28.5	44.5	64.1	87.3	114.0	178.1	278.3	456.0
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	24.7	34.0	43.3	45.7	67.5	88.7	111.8	143.1	18.7	27.8	34.0	34.0	47.5	62.4	78.7	100.7
Maximum embedment depth	[kN]	30.6	47.4	68.3	92.9	121.4	189.7	296.4	485.6	30.4	47.4	68.3	92.9	121.4	189.7	296.4	485.6
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	24.7	34.0	43.3	45.7	67.5	88.7	111.8	143.1	18.7	27.8	34.0	34.0	47.5	62.4	78.7	100.7
Maximum embedment depth	[kN]	32.7	51.1	73.6	100.2	130.9	204.5	319.6	523.6	33.7	51.1	73.6	100.2	130.9	204.5	319.6	523.6
SHEAR LOAD $V_{Ru,m}$																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	17.1	26.7	38.5	52.4	68.4	106.9	167.0	273.6	17.1	26.7	38.5	44.2	68.4	106.9	157.4	147.6
Maximum embedment depth	[kN]	17.1	26.7	38.5	52.4	68.4	106.9	167.0	273.6	17.1	26.7	38.5	52.4	68.4	106.9	167.0	273.6
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	18.2	28.5	41.0	55.8	72.8	113.8	177.8	286.1	18.2	28.5	41.0	55.8	72.8	113.8	157.4	201.4
Maximum embedment depth	[kN]	18.2	28.5	41.0	55.8	72.8	113.8	177.8	291.3	18.2	28.5	41.0	55.8	72.8	113.8	177.8	291.3
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	19.6	30.7	44.2	60.1	78.5	122.7	191.7	286.1	19.6	30.7	44.2	60.1	78.5	122.7	157.4	201.4
Maximum embedment depth	[kN]	19.6	30.7	44.2	60.1	78.5	122.7	191.7	314.1	19.6	30.7	44.2	60.1	78.5	122.7	191.7	314.1

Basic performance data

Size		Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32	Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
CHARACTERISTIC LOAD																	
TENSION LOAD N_{Rk}																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	16.6	26.4	35.2	35.2	49.2	64.7	81.5	104.3	8.29	11.0	16.6	19.4	25.1	37.7	57.0	66.4
Maximum embedment depth	[kN]	27.1	42.4	61.1	83.1	108.6	169.7	265.1	434.3	22.1	31.4	49.8	67.7	80.4	125.7	216.0	257.4
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	16.6	26.4	35.2	35.2	49.2	64.7	81.5	104.3	8.29	11.0	16.6	19.4	25.1	37.7	57.0	66.4
Maximum embedment depth	[kN]	28.9	45.2	65.0	88.5	115.6	180.6	282.3	462.4	22.1	31.4	49.8	67.7	80.4	125.7	216.0	257.4
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	16.6	26.4	35.2	35.2	49.2	64.7	81.5	104.3	8.29	11.0	16.6	19.4	25.1	37.7	57.0	66.4
Maximum embedment depth	[kN]	31.2	48.7	70.1	95.4	124.7	194.8	304.3	498.6	22.1	31.4	49.8	67.7	80.4	125.7	216.0	257.4
SHEAR LOAD V_{Rk}																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	13.6	21.2	30.5	41.6	54.3	84.8	132.5	208.5	13.6	21.2	30.5	38.7	50.3	75.4	114.1	132.7
Maximum embedment depth	[kN]	13.6	21.2	30.5	41.6	54.3	84.8	132.5	217.2	13.6	21.2	30.5	41.6	54.3	84.8	132.5	217.2
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	14.5	22.6	32.5	44.3	57.8	90.3	141.1	208.5	14.5	22.0	32.5	38.7	50.3	75.4	114.1	132.7
Maximum embedment depth	[kN]	14.5	22.6	32.5	44.3	57.8	90.3	141.1	231.2	14.5	22.6	32.5	44.3	57.8	90.3	141.1	231.2
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	15.6	24.4	35.1	46.9	62.3	97.4	152.2	208.5	15.6	22.0	33.2	38.7	50.3	75.4	114.1	132.7
Maximum embedment depth	[kN]	15.6	24.4	35.1	47.7	62.3	97.4	152.2	249.3	15.6	24.4	35.1	47.7	62.3	97.4	152.2	249.3

Basic performance data

Size		Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32	Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
DESIGN LOAD																	
TENSION LOAD N_{Rd}																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	9.22	14.7	19.6	19.6	27.3	35.9	45.3	57.9	4.61	6.11	9.22	10.8	14.0	20.9	31.7	36.9
Maximum embedment depth	[kN]	19.4	30.3	43.6	58.6	77.6	121.2	189.3	303.8	12.3	17.5	27.7	37.6	44.7	69.8	120.0	143.0
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	9.22	14.7	19.6	19.6	27.3	35.9	45.3	57.9	4.61	6.11	9.22	10.8	14.0	20.9	31.7	36.9
Maximum embedment depth	[kN]	20.6	32.3	46.5	58.6	82.6	129.0	201.6	303.8	12.3	17.5	27.7	37.6	44.7	69.8	120.0	143.0
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	9.22	14.7	19.6	19.6	27.3	35.9	45.3	57.9	4.61	6.11	9.22	10.8	14.0	20.9	31.7	36.9
Maximum embedment depth	[kN]	22.3	34.8	50.1	58.6	89.0	139.1	207.3	303.8	12.3	17.5	27.7	37.6	44.7	69.8	120.0	143.0
SHEAR LOAD V_{Rd}																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	9.05	14.1	20.4	27.7	36.2	56.6	88.4	139.0	9.05	14.1	20.4	25.8	33.5	50.3	76.1	88.5
Maximum embedment depth	[kN]	9.05	14.1	20.4	27.7	36.2	56.6	88.4	144.8	9.05	14.1	20.4	27.7	36.2	56.6	88.4	144.8
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	9.63	15.1	21.7	29.5	38.5	60.2	94.1	139.0	9.63	14.7	21.7	25.8	33.5	50.3	76.1	88.5
Maximum embedment depth	[kN]	9.63	15.1	21.7	29.5	38.5	60.2	94.1	154.2	9.63	15.1	21.7	29.5	38.5	60.2	94.1	154.2
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	10.4	16.2	23.4	31.3	41.6	64.9	101.5	139.0	10.4	14.7	22.1	25.8	33.5	50.3	76.1	88.5
Maximum embedment depth	[kN]	10.4	16.2	23.4	31.8	41.6	64.9	101.5	166.2	10.4	16.2	23.4	31.8	41.6	64.9	101.5	166.2
RECOMMENDED LOAD																	
TENSION LOAD N_{rec}																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	6.58	10.5	14.0	14.0	19.5	25.7	32.3	41.4	3.29	4.36	6.58	7.68	9.97	15.0	22.6	26.3
Maximum embedment depth	[kN]	13.9	21.6	31.2	41.9	55.4	86.6	135.2	217.0	8.78	12.5	19.8	26.9	31.9	49.9	85.7	102.1
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	6.58	10.5	14.0	14.0	19.5	25.7	32.3	41.4	3.29	4.36	6.58	7.68	9.97	15.0	22.6	26.3
Maximum embedment depth	[kN]	14.8	23.0	33.2	41.9	59.0	92.2	144.0	217.0	8.78	12.5	19.8	26.9	31.9	49.9	85.7	102.1
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	6.58	10.5	14.0	14.0	19.5	25.7	32.3	41.4	3.29	4.36	6.58	7.68	9.97	15.0	22.6	26.3
Maximum embedment depth	[kN]	15.9	24.8	35.8	41.9	63.6	99.4	148.0	217.0	8.78	12.5	19.7	26.9	31.9	49.9	85.7	102.1
SHEAR LOAD V_{rec}																	
$f_{uk} = 540$ (e.g. 500 B acc. to BS 4449; B 500 B acc. to SS 560)																	
Minimum embedment depth	[kN]	6.46	10.1	14.5	19.8	25.9	40.4	63.1	99.3	6.46	10.1	14.5	18.4	23.9	35.9	54.3	63.2
Maximum embedment depth	[kN]	6.46	10.1	14.5	19.8	25.9	40.4	63.1	103.4	6.46	10.1	14.5	19.8	25.9	40.4	63.1	103.4
$f_{uk} = 575$ (e.g. B 500 SP acc. to EC2)																	
Minimum embedment depth	[kN]	6.88	10.8	15.5	21.1	27.5	43.0	67.2	99.3	6.88	10.5	15.5	18.4	23.9	35.9	54.0	63.2
Maximum embedment depth	[kN]	6.88	10.8	15.5	21.1	27.5	43.0	67.2	110.1	6.88	10.8	15.5	21.1	27.5	43.0	67.2	110.1
$f_{uk} = 620$ (e.g. G-60 acc. to ASTM 615)																	
Minimum embedment depth	[kN]	7.42	11.6	16.7	22.4	29.7	46.4	72.5	99.3	7.42	10.5	15.8	18.4	23.9	35.9	54.3	63.2
Maximum embedment depth	[kN]	7.42	11.6	16.7	22.7	29.7	46.4	72.5	118.7	7.42	11.6	16.7	22.7	29.7	46.4	72.5	118.7

Design performance data

REBARS AS ANCHORS

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
TENSION LOAD										
STEEL FAILURE; F_{UK} = 540 (E.G. 500 B ACC. TO BS 4449; B 500 B ACC. TO SS 560)										
Characteristic resistance	N _{Rk,s}	[kN]	27.14	42.41	61.07	83.13	108.57	169.65	265.07	434.29
Partial safety factor	γ _{Ms}	-	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40
STEEL FAILURE; F_{UK} = 575 (E.G. B 500 SP ACC. TO EC2)										
Characteristic resistance	N _{Rk,s}	[kN]	28.90	45.16	65.03	88.51	115.61	180.64	282.25	462.44
Partial safety factor	γ _{Ms}	-	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40
STEEL FAILURE; F_{UK} = 620 (E.G. G-60 ACC. TO ASTM 615)										
Characteristic resistance	N _{Rk,s}	[kN]	31.16	48.69	70.12	95.44	124.66	194.78	304.34	498.63
Partial safety factor	γ _{Ms}	-	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40
COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, C20/25 (40°C/24°C)										
Characteristic bond resistance	T _{Rk}	[N/mm ²]	11.00	12.00	12.00	10.00	12.00	12.00	9.50	8.50
Sustained load factor	ψ ⁰ _{sus}	-	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, C20/25 (80°C/50°C)										
Characteristic bond resistance	T _{Rk}	[N/mm ²]	10.00	11.00	11.00	9.00	11.00	11.00	8.50	7.50
Sustained load factor	ψ ⁰ _{sus}	-	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72
COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, C20/25 (40°C/24°C)										
Characteristic bond resistance	T _{Rk}	[N/mm ²]	5.50	5.00	5.50	5.50	5.00	5.00	5.50	4.00
Sustained load factor	ψ ⁰ _{sus}	-	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, C20/25 (80°C/50°C)										
Characteristic bond resistance	T _{Rk}	[N/mm ²]	5.00	4.50	5.00	5.00	4.50	4.50	5.00	3.00
Sustained load factor	ψ ⁰ _{sus}	-	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72
COMBINED PULL-OUT AND CONCRETE CONE FAILURE										
Installation safety factor	γ _{inst}	-	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
Increasing factors for N _{Rd,p} - C30/37	ψ _c	-	1.04	1.04	1.04	1.04	1.04	1.04	1.04	1.04
Increasing factors for N _{Rd,p} - C40/50	ψ _c	-	1.07	1.07	1.07	1.07	1.07	1.07	1.07	1.07
Increasing factors for N _{Rd,p} - C50/60	ψ _c	-	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
CONCRETE CONE FAILURE										
Installation safety factor	γ _{inst}	-	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
Factor for cracked concrete	k _{cr,N}	-	7.70	7.70	7.70	7.70	7.70	7.70	7.70	7.70
Factor for non-cracked concrete	k _{ucr,N}	-	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00
Edge distance	c _{cr,N}	[mm]	1.5*h _{ef}	1.5*h _{ef}	1.5*h _{ef}	1.5*h _{ef}	1.5*h _{ef}	1.5*h _{ef}	1.5*h _{ef}	1.5*h _{ef}
Spacing	s _{cr,N}	[mm]	3.0*h _{ef}	3.0*h _{ef}	3.0*h _{ef}	3.0*h _{ef}	3.0*h _{ef}	3.0*h _{ef}	3.0*h _{ef}	3.0*h _{ef}
CONCRETE SPLITTING FAILURE										
Installation safety factor	γ _{inst}	-	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20

Design performance data

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
SHEAR LOAD										
STEEL FAILURE; F_{UK} = 540 (E.G. 500 B ACC. TO BS 4449; B 500 B ACC. TO SS 560)										
Characteristic resistance without lever arm	V _{Rk,s}	[kN]	13.57	21.21	30.54	41.56	54.29	84.82	132.54	217.15
Ductility factor	k _γ	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Characteristic resistance with lever arm	M _{Rk,s}	[Nm]	32.57	63.62	109.93	174.57	260.58	508.94	994.02	2084.61
Partial safety factor	γ _{Ms}	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
STEEL FAILURE; F_{UK} = 575 (E.G. B 500 SP ACC. TO EC2)										
Characteristic resistance without lever arm	V _{Rk,s}	[kN]	14.45	22.59	32.52	44.26	57.81	90.32	141.13	231.22
Ductility factor	k _γ	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Characteristic resistance with lever arm	M _{Rk,s}	[Nm]	34.68	67.74	117.06	185.88	277.47	541.92	1058.45	2219.72
Partial safety factor	γ _{Ms}	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
STEEL FAILURE; F_{UK} = 620 (E.G. G-60 ACC. TO ASTM 615)										
Characteristic resistance without lever arm	V _{Rk,s}	[kN]	15.58	24.35	35.06	47.72	62.33	97.39	152.17	249.32
Ductility factor	k _γ	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Characteristic resistance with lever arm	M _{Rk,s}	[Nm]	37.40	73.04	126.22	200.43	299.18	584.34	1141.28	2393.44
Partial safety factor	γ _{Ms}	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
CONCRETE PRY-OUT FAILURE										
Factor	k	-	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Installation safety factor	γ _{inst}	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
CONCRETE EDGE FAILURE										
Anchor diameter	d _{nom}	[mm]	8.00	10.00	12.00	14.00	16.00	20.00	25.00	32.00
Effective length of anchor	ℓ _f	[mm]	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})	min(300; h _{ef} ; 12d _{nom})
Installation safety factor	γ _{inst}	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Combined pull-out and concrete cone failure (EN 1992-4:2018, p.7.2.1.6., 7.14 - $N_{Rk,p}^0 = \psi_{sus}^0 * \tau_{Rk} * n * d * h_{ef}$), $h_{ef} = h_{nom}$

Allowable values for resistance in case of Seismic performance category C1

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
TENSION LOAD										
STEEL FAILURE; F_{UK} = 540 (E.G. 500 B ACC. TO BS 4449; B 500 B ACC. TO SS 560)										
Characteristic resistance	N _{Rk,s}	[kN]	27.14	42.41	61.07	83.13	108.57	169.65	265.07	434.29
Partial safety factor	γ _{MsN,seisC1}	-	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40
STEEL FAILURE; F_{UK} = 575 (E.G. B 500 SP ACC. TO EC2)										
Characteristic resistance	N _{Rk,s}	[kN]	28.90	45.16	65.03	88.51	115.61	180.64	282.25	462.44
Partial safety factor	γ _{MsN,seisC1}	-	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40
STEEL FAILURE; F_{UK} = 620 (E.G. G-60 ACC. TO ASTM 615)										
Characteristic resistance	N _{Rk,s}	[kN]	31.16	48.69	70.12	94.44	124.66	194.78	304.34	498.63
Partial safety factor	γ _{MsN,seisC1}	-	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40
COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, C20/25 (40°C/24°C)										
Characteristic bond resistance	T _{Rk}	[N/mm ²]	4.00	4.50	5.00	5.00	5.00	5.00	5.00	3.00
COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, C20/25 (80°C/50°C)										
Characteristic bond resistance	T _{Rk}	[N/mm ²]	3.50	4.00	4.50	4.50	4.50	4.50	4.50	2.50
COMBINED PULL-OUT AND CONCRETE CONE FAILURE										
Installation safety factor	γ _{inst}	-	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20

Design performance data

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø32
SHEAR LOAD										
STEEL FAILURE; F_{UK} = 540 (E.G. 500 B ACC. TO BS 4449; B 500 B ACC. TO SS 560)										
Characteristic resistance without lever arm	V _{Rk,s}	[kN]	9.50	14.84	21.38	29.09	38.00	59.38	92.78	152.00
Partial safety factor	γ _{M5V,seisC1}	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
STEEL FAILURE; F_{UK} = 575 (E.G. B 500 SP ACC. TO EC2)										
Characteristic resistance without lever arm	V _{Rk,s}	[kN]	10.12	15.81	22.76	30.98	40.46	63.22	98.79	161.85
Partial safety factor	γ _{M5V,seisC1}	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
STEEL FAILURE; F_{UK} = 620 (E.G. G-60 ACC. TO ASTM 615)										
Characteristic resistance without lever arm	V _{Rk,s}	[kN]	10.91	17.04	24.51	33.40	43.63	68.17	106.52	174.52
Partial safety factor	γ _{M5V,seisC1}	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50

Product commercial data

Product Code	Volume [ml]	Quantity [pcs]			Weight [kg]			Bar Codes
		Box	Outer	Pallet	Box	Outer	Pallet	
R-KEX-II-385	385	10	10	560	6.7	6.7	405.8	5906675028538
R-KEX-II-600	600	7	7	441	7.0	7.0	472.7	5906675293721

1) ETA-21/0244