# Rawlhammer SDS plus 18 V Li-Ion R-PRH18-24-XL2

The efficient hammer mechanism allows drilling holes in all building materials. RawlBattery's 18 V battery is interchangeable with Rawlplug 18 V devices.











### FEATURES AND BENEFITS >

Powerful brushless motor ensures high efficiency of the mechanism and increases the life time of the tool

3 functions - drilling / hammer drilling / chiseling makes the rotary hammer an extremely versatile power tool

Ergonomic mode selector allows convenient and quick switching between power tool functions

Compact design and lightweight construction reduces fatigue during long-term use

Electronic protection stop system engages during jamming to protect the user and the power tool

Two Li-Ion batteries with 5.0 Ah capacity and a 50-minute fast charger are included with the set to guarantee uninterrupted work

The SDS plus tool shank ensures full compatibility with a wide range of accessories available on the market and enables effective transfer of impact energy

## PODŁOŻA >



Concrete



Reinforced concrete



Brick



Stone



Steel



Timber





## RawlHAMMER R-PRH18-24-XL2



#### APPLICATIONS >

Drilling holes in concrete up to Ø 24 mm


Drilling holes in wood up to Ø 26 mm

Drilling holes in metal up to Ø 13 mm

Façades and roofs thermal insulations

Sheet metal drilling up to Ø10 mm x 2 mm thick

Wooden constructions: drilling in wood or chipboard (up to Ø 30 mm)

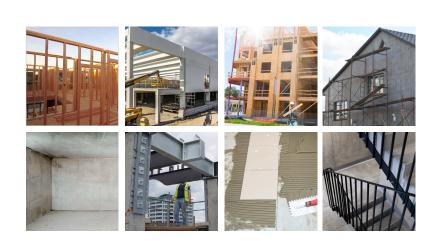


#### PRODUCT INFORMATION >

Index	Motor type	Battery voltage [V]	Battery capacity [Ah]	Rotation speed [rpm]	Impact frequency [ipm]	Impact energy [J]	Tool shank	Max drilling diameter concrete [mm]	Max drilling diameter wood [mm]	Max drilling diameter metal [mm]	Inner weight [kg]	Outer weight [kg]
R-PRH18-24- XL2	brushless	18	5.0	0-1000	0-4160	2.1	SDS plus	24	26	13	6.02	6.02



# RawlHAMMER R-PRH18-24-XL2

#### RELATED PRODUCTS >

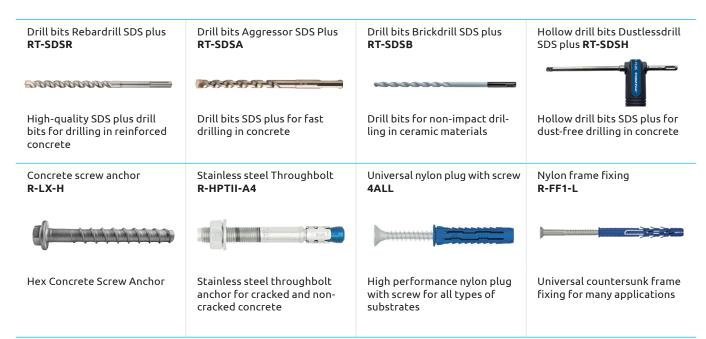

#### OFFER V

index	Power tool	Battery R-BAT-185001 [5.0 Ah]	Rawlcase R-RC-4414	Вох	Charger 6.5A R-CHR-186502	Manual	Protective gloves	EAN
R-RH18-24		The state of the s	PARAMETERS.					
R-PRH18-24-XL2	1	2	1	-	1	1	1	5906675553870
R-PRH18-24-XS	1	-	-	1	-	1	-	5906675553856
R-PRH18-24-S	1	-	1	-	-	1	-	5906675553863

