

R-HTPIII-A4 STAINLESS STEEL THROUGHBOLT ANCHOR A4 FOR CRACKED AND UNCRACKED CONCRETE

A new generation of R-HPTIII band anchors
- With variable embedment depth.



FEATURES AND BENEFITS ✓

Variable anchoring depth - allows you to choose embedment depth depending on the step anchor loads

Fire resistance R30-R120

Corrosion class of the anchor C1-C5

High performance in cracked concrete and uncracked C20/25-C50/60

Anchor bolt and band finished made of A4 stainless steel

Short distances from the edge of the concrete and between the anchors

Decreased displacement under influence loads

Anchor length identification mark in order determine the length/depth of the embedment. Allows the anchor to be identified after anchoring

Anchor size indicated on the bolt

Can be used to fasten steel/aluminum and wood elements

Quick and comfortable assembly with the application SDS mallet

Reliable and simple installation - due to the application through mounting anchoring is provided quick and simple

New shape of the expansion band with an additional locking lock and innovative ring at the end of the headband provides excellent connection between the anchor and the ground

Guarantee of maximum safety and best performance, confirmed by international standards approvals and certified tests laboratories

Application specification according to EAD 330232- 01-0601 and included in ETA-21/1082



SUBSTRATES ✓



Non-cracked concrete C20/25-C50/60



Cracked concrete C20/25-C50/60




Unreinforced concrete, Reinforced concrete



Natural Stone (after site testing)

R-HTPIII-A4 STAINLESS STEEL THROUGHBOLT ANCHOR A4 FOR CRACKED AND UNCRACKED CONCRETE

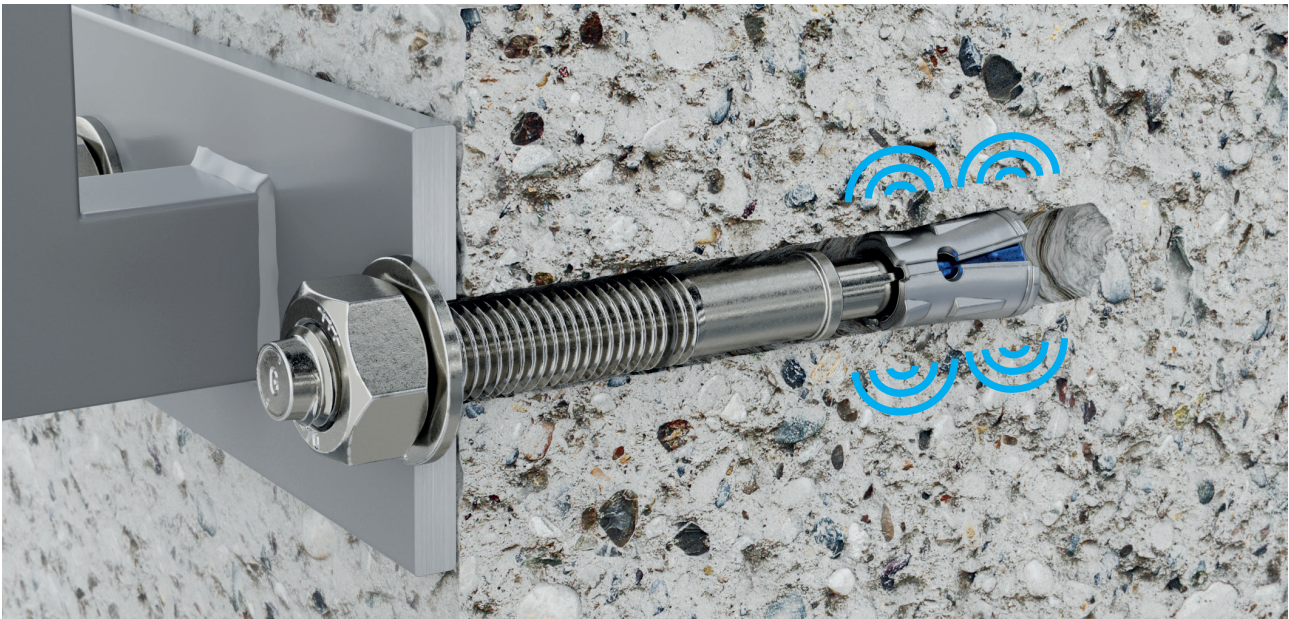

The R-HTPIII-A4 band anchor is an innovative anchor characterized by a variable embedment depth. High load capacities allow for shallower anchoring and fastening of a thicker fastener elements

APPLICATIONS

Ventilated facades

Barriers and railings

Steel structures


Curtain walls

Heavy equipment


Fences and gates

Passenger lifts and platforms

Stadium seats

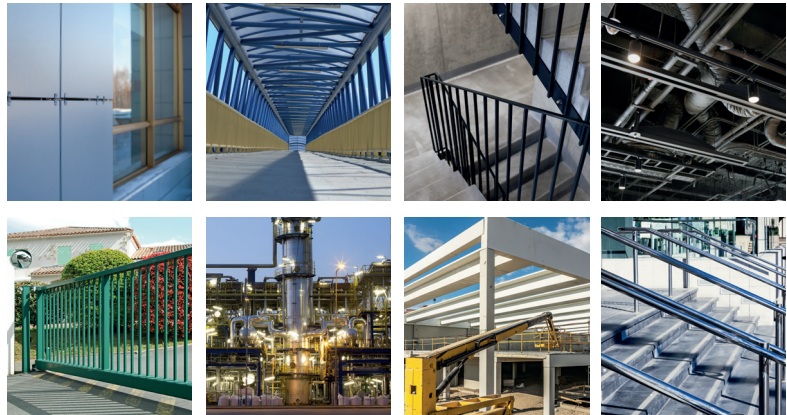

INSTALLATION GUIDE

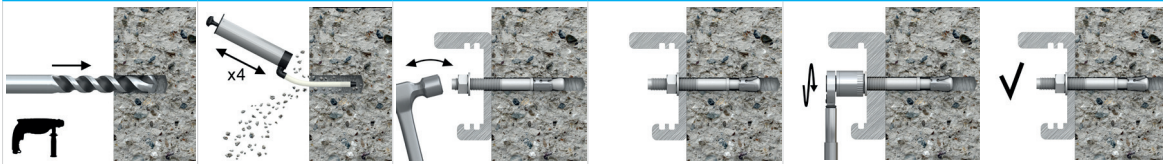

1. Drill the hole with rotary hammer drilling machine. Drill to a required depth.
2. Remove the drill cuttings and thoroughly clean the hole with a brush and pump
3. Insert the anchor into the hole through the fastener and hit it with a hammer to the appropriate depth.
4. Using a torque wrench, tighten the nut to the required torque.

PRODUCT INFORMATION

Size	Product	Diameter		Length		The diameter of the hole in the fastened element		Maximum thickness fastened element	
		d		L		d _f		t _{fix,max}	
		[mm]		[mm]		[mm]		[mm]	
M8	R-HTPIIIA408060/10	8		60		9		135	
	R-HTPIIIA408075/25	8		75					
	R-HTPIIIA408085/35	8		85					
	R-HTPIIIA408095/45	8		95					
	R-HTPIIIA408105/55	8		105					
	R-HTPIIIA408115/65	8		115					
M10	R-HTPIIIA410065/5	10		65		12		140	
	R-HTPIIIA410080/20	10		80					
	R-HTPIIIA410095/35	10		95					
	R-HTPIIIA410115/55	10		115					
	R-HTPIIIA410130/7	10		130					
	R-HTPIIIA410140/80	10		140					
M12	R-HTPIIIA412080/5	12		80		14		225	
	R-HTPIIIA412100/25	12		100					
	R-HTPIIIA412115/40	12		115					
	R-HTPIIIA412125/50	12		125					
	R-HTPIIIA412150/75	12		150					
	R-HTPIIIA412180/105	12		180					

INSTALLATION DATA

R-HTPIII-A4			M8		M10		M12	
drill hole diameter	d ₀	[mm]	Ø8		Ø10		Ø12	
Nominal embedment depth	h _{nom} ≥	[mm]	40-77		48-148		60-135	
Maximum thickness of fixture	t _{fix,max}	[mm]	135,0		140,0		225,0	
Depth of drill hole	h ₀ ≥	[mm]	45-82		53-113		68-143	
Installation torque	T _{inst}	[Nm]	20		40		60	
Minimum member thickness	h _{min} ≥	[mm]	80,0	100,0	80,0	120,0	100,0	140,0
Minimum edge distance	s _{min}	[mm]	35,0		40,0		50,0	
Minimum spacing	c _{min}	[mm]	40,0		45,0		55,0	
Effective embedment depth	h _{g,f}		33-47	48-70	40-59	60-100	50-69	70-125




R-HTPIII-A4			M8		M10		M12	
Characteristic tension steel failure-Steel	N _{Rk,s}	[kN]	21,9		33,3		48,7	
Effective embedment depth (Pull-out failure) cracked concrete	N _{Rk,p}	[kN]	6,0	9,5	13,4	15,0	20,2	20,2
Effective embedment depth (Pull-out failure) non cracked concrete	N _{Rk,p}	[kN]	6,5	13,0	18,5	20,0	28,2	28,8
Characteristic resistance - Steel	V ⁰ _{Rk,s}	[kN]	13,7		22,8		35,8	

R-HTPIII-A4 STAINLESS STEEL THROUGHBOLT ANCHOR A4 FOR CRACKED AND UNCRACKED CONCRETE

PRODUCT COMMERCIAL DATA

Size	Product	Diameter	Length	Package weight unitary	Quantity	
		d	L		Packaging single	Quantity on the pallet
		[mm]	[mm]			
M8	R-HPTIIIA408060/10	8	60	25,6	100	16000
	R-HPTIIIA408075/25	8	75	30,63	100	16000
	R-HPTIIIA408085/35	8	85	33,8	100	16000
	R-HPTIIIA408095/45	8	95	30,7	100	12000
	R-HPTIIIA408105/55	8	105	40,6	50	8000
	R-HPTIIIA408115/65	8	115	43,1	100	8000
M10	R-HPTIIIA410065/5	10	65	47,53	50	8000
	R-HPTIIIA410080/20	10	80	54,96	50	8000
	R-HPTIIIA410095/35	10	95	62,46	50	6000
	R-HPTIIIA410115/55	10	115	73,02	50	6000
	R-HPTIIIA410130/7	10	130	80,00	50	8000
	R-HPTIIIA410140/80	10	140	84,96	50	8000
M12	R-HPTIIIA412080/5	12	80	82,34	50	8000
	R-HPTIIIA412100/25	12	100	95,95	50	8000
	R-HPTIIIA412115/40	12	115	107,74	50	6000
	R-HPTIIIA412125/50	12	125	115,32	50	6000
	R-HPTIIIA412150/75	12	150	134,34	50	4000
	R-HPTIIIA412180105	12	180	155,32	50	4000

RELATED PRODUCT

DRILLING		POWER TOOLS	POWER TOOLS	POWER TOOLS	POWER TOOLS
DRILLING	POWER TOOLS	Hammer drill SDS-PLUS, 850 W, 2,5J R-PRH26850	Hammer drill 18V SDS-PLUS 2,0J 5,0Ah R-PRH18	Torque wrench 20-100 Nm 1/2" R-HTW-20-100	
					
DRILLING	ACCESSORIES FOR POWER TOOLS	Drill Aggressor SDS Plus RT-SDSA	Drill Rebar drill SDS Plus RT-SDSR	Impact sockets 1/2" RT-IS	Hammer RT-HAM
		