

T-GB Construction nails

Construction nails for connecting wooden construction elements and secure anchoring of wood connectors



Product information

Features and benefits

- Made of low carbon cold drawn steel wire
- Flat head provides a large striking surface and solid holding power
- Smooth shank provides versatility for everyday use
- Checkered textured head to prevent slippage
- Diamond shaped sharp point for easy drive in of the nail
- Available in zinc electroplated version for enhanced corrosion resistance

Applications

- Applicable for general purposes
- Wooden roof constructions
- Anchoring of wood connection elements
- Wooden fences
- Pergolas, bowers, sheds
- Framing applications

Base materials


Approved for use in:

- Wood
- Timber

Also suitable for use in:

- Plywood
- Chipboard
- Wood with metal
- Branches

Installation guide

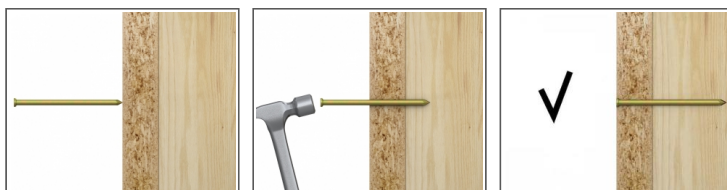

1. Choose the appropriate dimension and length of the nail
2. Set the fastened element in required place and position
3. Hammer in the nail until the head is flush
4. Use the necessary quantity of nails to fasten the element secure

Product information

Product Code	Nail	
	Diameter	Length
	d	L
	[mm]	[mm]
T-GB-20040-5	2	40
T-GB-22050-5	2.2	50
T-GB-25060-5	2.5	60
T-GB-28065-5	2.8	65
T-GB-30070-5	3	70
T-GB-30080-5	3	80
T-GB-35090-5	3.5	90
T-GB-40100-5	4	100
T-GB-45125-5	4.5	125
T-GB-50150-5	5	150
T-GB-60175-5	6	175
T-GB-70200-5	7	200
T-GB-70230-5	7	230
T-GB-80250-5	8	250
T-GB-80280-5	8	280
T-GB-80300-5	8	300
T-GB-20040-OC	2	40
T-GB-22050-OC	2.2	50
T-GB-25060-OC	2.5	60
T-GB-28065-OC	2.8	65
T-GB-30070-OC	3	70
T-GB-14030	1.4	30

Product commercial data

Product Code	Nail		Quantity [pcs]			Weight [kg]			Bar Codes
	Diameter [mm]	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
T-GB-20040-5	2	40	5	5	900	5.1	5.1	945.8	5906675734040
T-GB-22050-5	2.2	50	5	5	900	5.1	5.1	947.5	5906675734149
T-GB-25060-5	2.5	60	5	5	900	5.1	5.1	942.1	5906675734248
T-GB-28065-5	2.8	65	5	5	900	5.1	5.1	944.4	5906675734347
T-GB-30070-5	3	70	5	5	800	5.2	5.2	858.3	5906675734446
T-GB-30080-5	3	80	5	5	1000	5.0	5.0	1031.4	5906675734545
T-GB-35090-5	3.5	90	5	5	800	5.1	5.1	840.9	5906675734644
T-GB-40100-5	4	100	5	5	800	5.2	5.2	860.2	5906675734743
T-GB-45125-5	4.5	125	5	5	800	5.1	5.1	845.4	5906675734941
T-GB-50150-5	5	150	5	5	900	5.1	5.1	953.2	5906675940076
T-GB-60175-5	6	175	5	5	900	5.1	5.1	946.7	5906675940175
T-GB-70200-5	7	200	5	5	900	5.1	5.1	942.2	5906675940274
T-GB-70230-5	7	230	5	5	900	5.3	5.3	980.4	5906675941271
T-GB-80250-5	8	250	5	5	900	5.1	5.1	948.5	5906675941370
T-GB-80280-5	8	280	5	5	900	5.1	5.1	941.5	5906675941479
T-GB-80300-5	8	300	5	5	900	5.2	5.2	961.3	5906675941578
T-GB-20040-OC	2	40	5	5	800	5.1	5.1	842.5	5906675736075
T-GB-22050-OC	2.2	50	5	5	800	5.0	5.0	830.0	5906675736174
T-GB-25060-OC	2.5	60	5	5	800	5.1	5.1	840.7	5906675736273
T-GB-28065-OC	2.8	65	5	5	800	5.0	5.0	830.0	5906675736372
T-GB-30070-OC	3	70	5	5	800	5.1	5.1	842.8	5906675736471
T-GB-14030	1.4	30	5	5	900	5.3	5.3	976.4	5906675064604