


Z-ES UNIVERSAL DIRECT BRACKET

The hanger for grid work of dropped ceilings

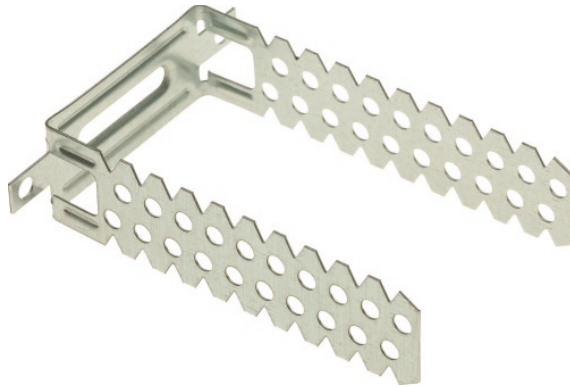

Product information

Features and benefits

- It is used for direct mounting to walls
- Element made of steel DX51D
- Coating Z100 up to Z275 g/mm²
- Class A1 fire reaction
- Class B environmental conditions

Applications

- Installation of dropped ceilings grid work
- Wall and ceiling plasteboard framing

Product information

| Product Code | Top shelf length | Length of attachment |
|--------------|------------------|----------------------|
| | [mm] | |
| Z-ES-50/070 | 50 | 70 |
| Z-ES-50/120 | 50 | 120 |
| Z-ES-60/070 | 60 | 70 |
| Z-ES-60/120 | 60 | 120 |

Product commercial data

| Product Code | Top shelf length [mm] | Length of attachment [mm] | Quantity [pcs] | | | Weight [kg] | | | Bar Codes |
|--------------|-----------------------|---------------------------|----------------|-------|--------|-------------|-------|--------|---------------|
| | | | Box | Outer | Pallet | Box | Outer | Pallet | |
| Z-ES-50/070 | 50 | 70 | | | | | | | |
| Z-ES-50/120 | 50 | 120 | 250 | 250 | 10000 | 11.4 | 11.4 | 487.5 | 5906675106991 |
| Z-ES-60/070 | 60 | 70 | 250 | 250 | 22000 | 10.5 | 10.5 | 951.4 | 5906675197524 |
| Z-ES-60/120 | 60 | 120 | 250 | 250 | 14000 | 10.5 | 10.5 | 616.3 | 5906675197623 |