

R-GOK-N Nylon telescopic sleeve with round plate

Telescopic nylon sleeve for flat roof insulation fixing. Combined together with the corresponding screw allows application in all types of substrates.



Approvals and Reports

- ETA-09/0346
- UKTA-22/6338



Product information

Features and benefits

- Impact-resistant material used ensures constant mechanical properties over the lifetime of a roof. Also, retains its properties over a wide temperature range.
- Should be used with combination of any Rawlplug roofing screws: WBT to concrete, WX/WO to steel sheat, WW to wood.
- Round plate eliminates the need of positioning the fixing during the installation, the bottom part of the connection sleeve is designed to carry very heavy loads during operation of the roof.
- Internal sleeve design allows pre-assembly with any Rawlplug roofing screw, shortening installation.
- The cone's optimal shape facilitates speed and ease of installation through the thermal insulation.
- Guarantees the highest load capacity of the roof construction for both static and dynamic loads in accordance with ETAG006.

Applications


- Systems of mechanically fastened flexible roof waterproofing membrane

Base materials

Approved for use in:


- Concrete
- Concrete Slab
- Metal Sheet & Profiles
- Timber
- Plywood
- Chipboard

Installation guide

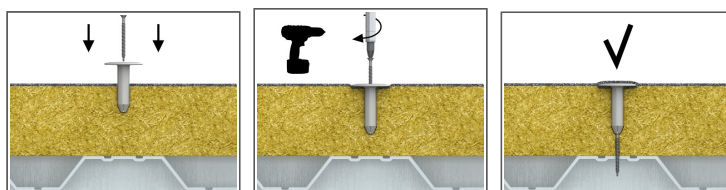

1. Select a suitable screw type for substrate
2. Lightly insert plastic sleeve into insulation material
3. Using drilling machine, drive the screw into substrate until fixing depth is reached

Product information

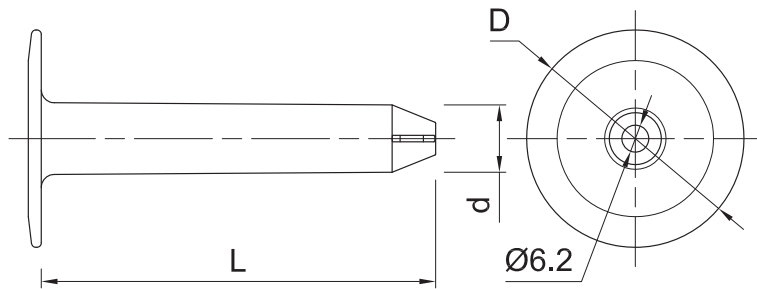

Product Code	Plastic sleeve			Fixture
	Diameter	Length	Plate diameter	Min. thickness
	d	L	D	t _{fix}
	[mm]	[mm]	[mm]	[mm]
R-GOK-525-N	15.5	525	50	540
R-GOK-625-N	15.5	625	50	640
R-GOK-725-N	15.5	725	50	740

Product commercial data

Product Code	Plastic sleeve		Quantity [pcs]			Weight [kg]			Bar Codes
	Diameter [mm]	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
R-GOK-525-N	15.5	525	50	50	600	4.2	4.2	80.0	5906675113883
R-GOK-625-N	15.5	625	50	50	600	4.7	4.7	86.2	5906675113890
R-GOK-725-N	15.5	725	50	50	600	5.2	5.2	92.4	5906675113906

1) ETA-09/0346