


K-P3-416 HOOK-HOOK TENSIONER

Hook-hook turnbuckle for adjusting the tension and length of wires and ropes

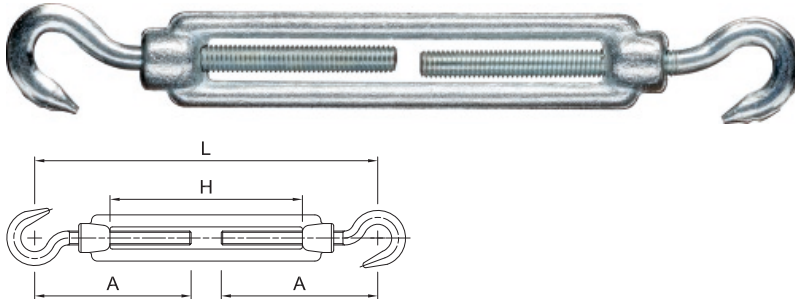

Product information

Features and benefits

- Made of low carbon steel
- Consists of two roll threaded forged steel jaws
- Two welded hook terminals are screwed into each end of a forged steel frame
- Hot galvanized for enhanced corrosion resistance
- Many uses in a variety of industries.
- Steel ropes and cables can be tightened
- [English]: W opakowaniu sztukowym

Applications

- Adjusting the tension and length of steel wire and ropes
- Construction strapping tensioning
- [English]: Są używane do działania jako punkt zabezpieczający i do tworzenia napięcia w linach otaczających ring zapaśniczy lub bokserki
- [English]: Wykorzystywane w transporcie morskim do napinania elementów odciągów i oliowania statku
- [English]: W budownictwie są często używane do zapewnienia wsparcia naprężenia dla mostów wiszących, dużych budynków i poręczy linowych
- [English]: W lotnictwie służą do napinania kabli i przewodów występujących w konstrukcjach samolotów

Product information

| Product Code | Dimensions | | | |
|-------------------|------------|------|------|------|
| | H | L | A | B |
| | [mm] | [mm] | [mm] | [mm] |
| K-P3-416-06110-HH | 86 | 110 | 76 | 66 |
| K-P3-416-08110-HH | 77 | 110 | 88 | 73 |
| K-P3-416-10125-HH | 86 | 120 | 109 | 85 |

Product commercial data

| Product Code | Dimensions | | | | Quantity [pcs] | | | Weight [kg] | | | Bar Codes |
|-------------------|------------|--------|--------|--------|----------------|-------|--------|-------------|-------|--------|---------------|
| | H [mm] | L [mm] | A [mm] | B [mm] | Box | Outer | Pallet | Box | Outer | Pallet | |
| K-P3-416-06110-HH | 86 | 110 | 76 | 66 | 30 | 30 | 1620 | 3.0 | 3.0 | 192.0 | 5906675511184 |
| K-P3-416-08110-HH | 77 | 110 | 88 | 73 | 30 | 30 | 1620 | 5.4 | 5.4 | 321.6 | 5906675511214 |
| K-P3-416-10125-HH | 86 | 120 | 109 | 85 | 20 | 20 | 1080 | 6.2 | 6.2 | 364.8 | 5906675511245 |