


## T-GPA Roofing nails DIN 1160A

Smooth shank nails for roofing applications



### Product information

#### Features and benefits

- Made of low carbon cold drawn steel wire
- Manufactured in accordance with DIN 1160A
- Flat head provides a large striking surface and solid holding power
- Smooth shank provides versatility for everyday use
- Diamond shaped sharp point for easy drive in of the nail
- Available in zinc electroplated version for enhanced corrosion resistance

#### Applications

- Wooden roof constructions
- Wooden fences
- Fastening plastic elements liable to damage while installing
- Fixing of bitumic membrane on roof constructions

#### Base materials


##### Approved for use in:

- Wood
- Timber

##### Also suitable for use in:

- Plywood
- Chipboard
- Branches
- Wood with metal

### Installation guide

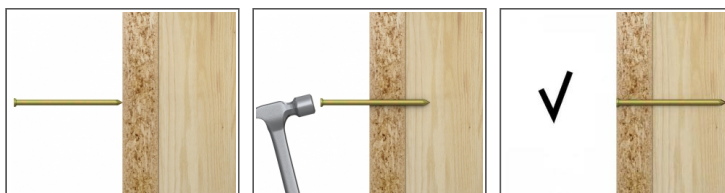

1. Choose the appropriate dimension and length of the nail
2. Set the fastened element in required place and position
3. Hammer in the nail until the head is flush
4. Use the necessary quantity of nails to fasten the element secure

## Product information

Product Code	Nail	
	Diameter	Length
	d	L
	[mm]	[mm]
T-GPA-25025	2.5	25
T-GPA-30020	3	20
T-GPA-30025	3	25
T-GPA-30030	3	30
T-GPA-30035	3	35
T-GPA-30040	3	40
T-GPA-30020-OC	3	20
T-GPA-30025-OC	3	25
T-GPA-30030-OC	3	30
T-GPA-30035-OC	3	35
T-GPA-30040-OC	3	40

## Product commercial data

Product Code	Nail		Quantity [pcs]			Weight [kg]			Bar Codes
	Diameter [mm]	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
T-GPA-25025	2.5	25	5	5	800	5.1	5.1	844.7	5906675945774
T-GPA-30020	3	20	5	5	800	5.1	5.1	839.0	5906675107868
T-GPA-30025	3	25	5	5	900	5.1	5.1	938.1	5906675107967
T-GPA-30030	3	30	5	5	900	5.2	5.2	970.3	5906675117164
T-GPA-30035	3	35	5	5	800	5.1	5.1	852.7	5906675108162
T-GPA-30040	3	40	5	5	800	5.2	5.2	856.7	5906675108360
T-GPA-30020-OC	3	20	5	5	800	5.4	5.4	895.4	5906675108070
T-GPA-30025-OC	3	25	5	5	900	5.1	5.1	951.8	5906675108063
T-GPA-30030-OC	3	30	5	5	900	5.1	5.1	945.3	5906675117263
T-GPA-30035-OC	3	35	5	5	800	5.0	5.0	836.1	5906675108261
T-GPA-30040-OC	3	40	5	5	800	5.1	5.1	843.8	5906675108469