

T-GS Spiral shank nails

Spiral shank nails for connecting hard and dense wood construction elements



Product information

Features and benefits

- Specifically designed for use with hardwoods and dense materials
- Manufactured in accordance with DIN 68163A
- Made of low carbon cold drawn steel wire
- Spiral thread shank causes the turn when the nail is driven and forms nail's own thread in the wood fibers
- The threads on the shank separate the wood fibers, which then lock back into the rings causing greater removal resistance
- Flat head provides a large striking surface and solid holding power
- Checkered textured head to prevent slippage
- Diamond shaped sharp point for easy drive in of the nail
- Available in zinc electroplated version for enhanced corrosion resistance

Applications

- Flooring, siding, decking, pallets and truss rafters
- Wooden constructions
- Wooden fences
- Wooden roof constructions
- Pergolas, bowers, sheds
- Exotic wood and dense material constructions

Base materials


Approved for use in:

- Wood
- Timber

Also suitable for use in:


- Branches
- Chipboard
- Timber
- Plywood
- Wood with metal

Installation guide

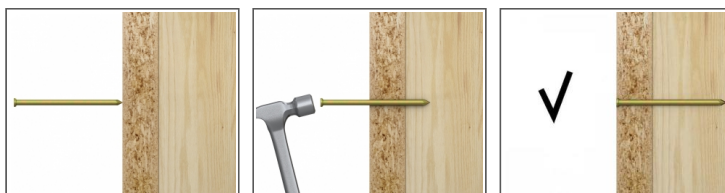

1. Choose the appropriate dimension and length of the nail
2. Set the fastened element in required place and position
3. Hammer in the nail until the head is flush
4. Use the necessary quantity of nails to fasten the element secure

Product information

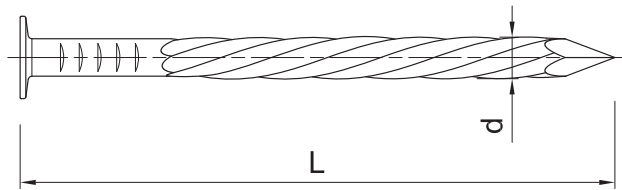

Product Code	Nail	
	Diameter	Length
	d	L
	[mm]	[mm]
T-GS-30050	3	50
T-GS-30060	3	60
T-GS-35070	3.5	70
T-GS-35080	3.5	80
T-GS-35090	3.5	90
T-GS-35100	3.5	100
T-GS-45125	4.5	125
T-GS-30050-OC	3	50
T-GS-30060-OC	3	60
T-GS-35070-OC	3.5	70
T-GS-35080-OC	3.5	80
T-GS-35090-OC	3.5	90
T-GS-35100-OC	3.5	100
T-GS-45125-OC	4.5	125

Product commercial data

Product Code	Nail		Quantity [pcs]			Weight [kg]			Bar Codes
	Diameter [mm]	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
T-GS-30050	3	50	5	5	800	5.0	5.0	830.0	5906675793078
T-GS-30060	3	60	5	5	800	5.1	5.1	844.1	5906675793177
T-GS-35070	3.5	70	5	5	800	5.1	5.1	844.7	5906675793276
T-GS-35080	3.5	80	5	5	800	5.1	5.1	845.5	5906675793375
T-GS-35090	3.5	90	5	5	800	5.1	5.1	847.3	5906675118734
T-GS-35100	3.5	100	5	5	800	5.1	5.1	844.1	5906675793573
T-GS-45125	4.5	125	5	5	800	5.1	5.1	845.7	5906675793672
T-GS-30050-OC	3	50	5	5	800	5.1	5.1	846.6	5906675738178
T-GS-30060-OC	3	60	5	5	800	5.1	5.1	843.0	5906675738277
T-GS-35070-OC	3.5	70	5	5	800	5.1	5.1	843.3	5906675738376
T-GS-35080-OC	3.5	80	5	5	800	5.1	5.1	844.6	5906675738475
T-GS-35090-OC	3.5	90	5	5	800	5.1	5.1	845.0	5906675738574
T-GS-35100-OC	3.5	100	5	5	800	5.1	5.1	843.0	5906675738673
T-GS-45125-OC	4.5	125	5	5	800	5.1	5.1	844.6	5906675738772