


R-SC40-PCO Pipe and cable plastic clip

Plastic brackets for pipes and conduits for applications in electrical installations, water and sewage systems, and HVAC

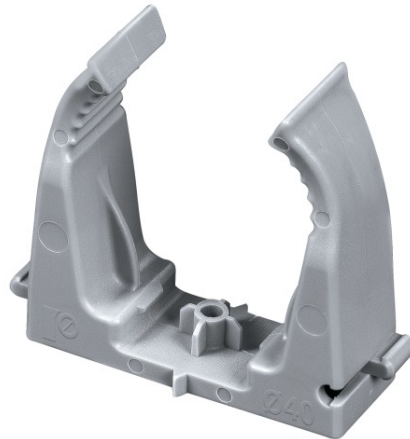

Product information

Features and benefits

- Easy to install with the possibility of setting on the nail gun barrel, and one-hand assembly
- Possibility of joining grips in larger sections with special locks on the sides of the handle
- Can be used in heating systems using installation rail
- Special socket design ensures compatibility with most nail guns available on the market
- The range of the offer provides the ability to handle most plumbing applications
- The hole in the base allows mounting the bracket using the traditional method

Applications


- Installing cables in pipes and corrugated conduits
- Fixing pipes and cables in HVAC systems
- Pipe installation in plumbing

Base materials

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Structural Steel

Corresponding products

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC plastic collated concrete pins with fuel cells
- R-KSC plastic collated pins for steel with fuel cells

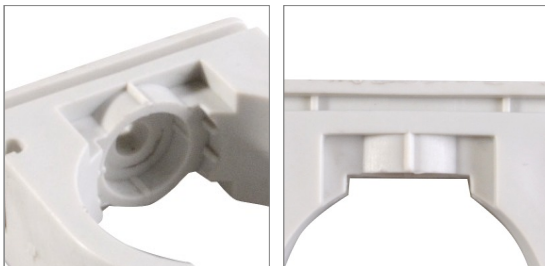

Product commercial data

Index	Bag quantity	Diameter	High	Length	Inch size	Box weight	Outer weight	EAN
		[mm]	[mm]	[mm]	[inch]	kg	kg	
R-SC40-PCO-16	100 pcs	16	27	32		0.42	3.32	5906675470559
R-SC40-PCO-20	100 pcs	20	29	30	1/2	0.43	3.43	5906675470566
R-SC40-PCO-25	90 pcs	25	35	35	3/4	0.49	3.93	5906675470573
R-SC40-PCO-32	50 pcs	32	42	42	1	0.34	2.74	5906675470580
R-SC40-PCO-40	35 pcs	40	49	50	1 1/4	0.30	2.37	5906675470375

Technical Data

Parameter	Value	Norm
Humidity absorption	2,80%	[English]: ISO 62 (23 stopnie Celsjusza/50% RH)
[English]: Chłonność wody do nasycenia	9,50%	[English]: ISO 62 (23 stopnie Celsjusza/SAT)
Halogen content	-	[English]: według klasyfikacji materiału
Silicones content	-	[English]: według klasyfikacji materiału
Flammability horizontal/vertical*	HB [^]	[English]: UL94
Density	1,14g/cm ³	[English]: ISO 1183
[English]: klasyfikacja materiału	-	[English]: ISO 16396: PA6-HI, MR, S14-020

<Exception java.lang.NullPointerException without message IN Frame [Ta-