R-GP6 FUEL CELL FOR WW90II WOOD NAILER

Gas nailer for WW90II wood nailer guarantees the highest operating parameters and high efficiency



Clean Propane & Butane mixiture reduces carbon residue

High quality propellant for increased performance

Contains a fully synthetic oil for lubricating the tool

Compatible with leading manufactures tools

The temperature range depends on the type of gas - details in the technical table

BASE MATERIALS




Powering gas powered timber framing nailers










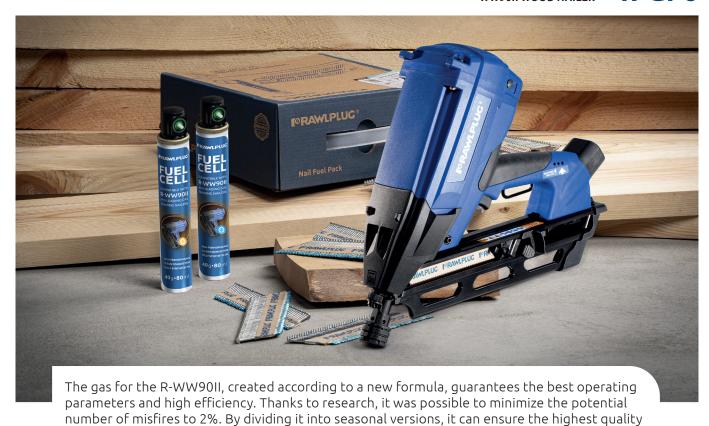

APPLICATIONS >



source for the R-WW90II nailer.

Separating for two seasonal version ensures highest quality of work

High quality propellant for incrased performance



of work regardless of the ambient temperature. After a long research process, it is the best fuel







PRODUCT INFORMATION >

Index	Fuel type	Lubrication	Size [mm]	Value	Operating temperatures [°C]	Efficiency [shots]	Box weight [kg]	Outher weight [kg]	EAN
R-GP6-S	Propan-Butan	propane & butane	165	80	5 - 55	min. 1000	0.40	4.00	590667551259
R-GP6-W	Propan-Butan	propane & butane	165	80	-8 - 25	min. 1000	0.40	4.00	590667551256

RELATED PRODUTS





Gas powered wood nailer

R-KIT-WW90/SC40



Cleaning kit for gas powered tools

SPG NAILS



Nails on paper for WW90II wood nailer

