

MULTI CAVITY WALL TIES

General anchor for use in masonry with thin adhesive-bonded joints and also in standard joints



Product information

Features and benefits

- Stainless steel material for high corrosion resistance
- Thin ends of the anchor designed especially for thin mortar using

Applications

- Cavity walls

Base materials


Approved for use in:

- Solid Brick
- Hollow Brick
- Vertically-perforated Clay Block
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block

Installation guide

1. The flat side of the anchor is built in to the structural wall at a depth of 90mm.
2. The serrated zone is built in to the facing wall at a depth of 50mm.

Product information

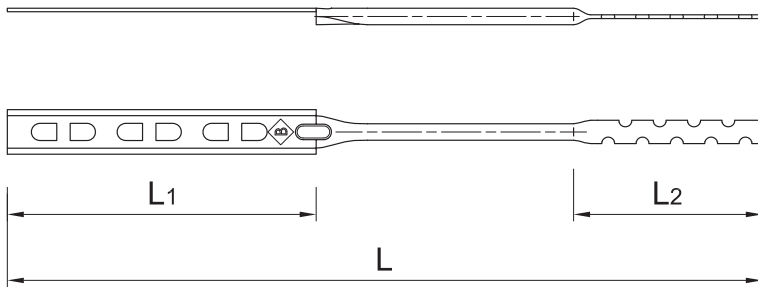

Product Code	Length			Wall distance	Fixture
	L	L1	L2		Max. thickness
				[mm]	
MULTI-220	220	50	90	80	40
MULTI-250	250	50	90	110	70
MULTI-280	280	50	90	140	100
MULTI-300	300	50	90	160	120
MULTI-320	320	50	90	180	140

Installation data

Size			
Min. installation depth	h_{nom}	[mm]	90
Min. substrate thickness	h_{min}	[mm]	120
Min. spacing	s_{min}	[mm]	300
Min. edge distance	c_{min}	[mm]	150

Product commercial data

Product Code	Length [mm]		Quantity [pcs]			Weight [kg]			Bar Codes
			Box	Outer	Pallet	Box	Outer	Pallet	
MULTI-220	220	50	250			2.6			5906675231020
MULTI-250	250	50	250	250	30000	3.1	3.1	399.6	5906675231327
MULTI-280	280	50	250	250	31500	3.3	3.3	443.3	5906675231525
MULTI-300	300	50	250	250	31500	3.7	3.7	495.6	5906675231624
MULTI-320	320	50	250	250	31500	3.8	3.8	508.8	5906675231723