

UC Chipboard screws

Chipboard screw for application in wood



Approvals and Reports

PN-EN 14566 + A1: 2012

DoP-EN14566

Reaction to fire: A1

Flexural strength: pass

CE
10

Product information

Features and benefits

- Thread geometry allowing application in all wood materials
- The optimised head geometry with underhead cutting ribs also affords an exact and splinter-free surface finish even with connections close to the edge
- The double cone head allows flush fixing of the screw

Applications


- General wood joints
- Plankings
- Door and metal fittings
- Finger tightening elements
- Skirting

Base materials

Approved for use in:


- Chipboard
- Wood

Installation guide

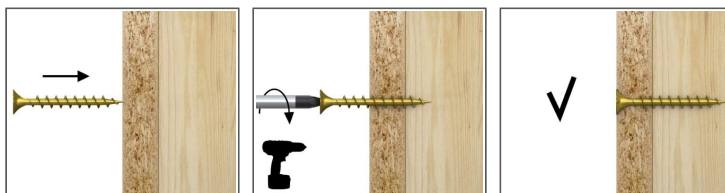

1. Drive the screw straight until the head is flush
2. Screws with partial thread can clamp wooden parts avoiding spaces between them
3. Full-thread screws are recommended for fastening thin parts and in less firm wood materials (e.g. soft woods)
4. Screws with countersunk head allow flush connection

Product information

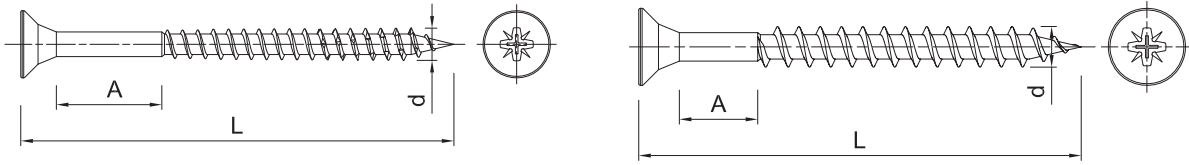

Size	Product Code	Screw				Fixture		
		Diameter	Length	Zone without thread	Recess	Max. thickness		
		d	L	A	-	t _{fix} PVC profile	t _{fix} Timber	t _{fix} KCX with screw to wood
		[mm]	[mm]	[mm]	-	[mm]	[mm]	[mm]
Ø2.5	UC-2508	2.5	8	-	PZ1	-	-	-
	UC-2510	2.5	10	-	PZ1	-	-	-
	UC-2513	2.5	13	-	PZ1	3	3	-
	UC-2516	2.5	16	-	PZ1	6	6	-
Ø3	UC-3012	3	12	-	PZ1	-	-	-
	UC-3016	3	16	-	PZ1	4	4	-
	UC-3020	3	20	-	PZ1	8	8	-
	UC-3025	3	25	-	PZ1	13	13	-
	UC-3030	3	30	-	PZ1	18	18	-
	UC-3035	3	35	-	PZ1	23	23	-
	UC-3040	3	40	-	PZ1	28	28	-
Ø3.5	UC-3512	3.5	12	-	PZ2	-	-	-
	UC-3516	3.5	16	-	PZ2	3	2	-
	UC-3520	3.5	20	-	PZ2	7	6	-
	UC-3525	3.5	25	-	PZ2	12	11	-
	UC-3530	3.5	30	-	PZ2	17	16	-
	UC-3535	3.5	35	-	PZ2	22	21	-
	UC-3540	3.5	40	-	PZ2	27	26	-
	UC-3545	3.5	45	-	PZ2	32	31	-
	UC-3550	3.5	50	-	PZ2	37	36	-
Ø4	UC-4016	4	16	-	PZ2	1	-	-
	UC-4020	4	20	-	PZ2	5	4	-
	UC-4025	4	25	-	PZ2	10	9	-
	UC-4030	4	30	-	PZ2	15	14	-
	UC-4035	4	35	-	PZ2	20	19	-
	UC-4040	4	40	-	PZ2	25	24	-
	UC-4045	4	45	-	PZ2	30	29	-
	UC-4050	4	50	-	PZ2	35	34	-
	UC-4060	4	60	-	PZ2	45	44	-
UC-4070	4	70	9	PZ2	55	54	-	
Ø4.5	UC-4520	4.5	20	-	PZ3	4	2	-
	UC-4525	4.5	25	-	PZ3	9	7	-
	UC-4530	4.5	30	-	PZ3	14	12	-
	UC-4535	4.5	35	-	PZ3	19	17	-
	UC-4540	4.5	40	-	PZ3	24	22	-
	UC-4545	4.5	45	-	PZ3	29	27	-
	UC-4550	4.5	50	-	PZ3	34	32	-
	UC-4560	4.5	60	-	PZ3	44	42	-
	UC-4570	4.5	70	15	PZ3	54	52	-
Ø5	UC-5020	5	20	-	PZ3	2	-	-
	UC-5025	5	25	-	PZ3	7	5	-
	UC-5030	5	30	-	PZ3	12	10	-

Product information

Size	Product Code	Screw				Fixture			
		Diameter	Length	Zone without thread	Recess	Max. thickness			
		d	L	A	-	t _{fix} PVC profile	t _{fix} Timber	t _{fix} KCX with screw to wood	
		[mm]	[mm]	[mm]	-	[mm]	[mm]	[mm]	
Ø5	UC-5035	5	35	-	PZ3	17	15	-	
	UC-5040	5	40	-	PZ3	22	20	-	
	UC-5045	5	45	-	PZ3	27	25	-	
	UC-5050	5	50	-	PZ3	32	30	70	
	UC-5060	5	60	-	PZ3	42	40	80	
	UC-5070	5	70	17	PZ3	52	50	90	
	UC-5080	5	80	20	PZ3	62	60	100	
	UC-5090	5	90	27	PZ3	72	70	110	
Ø6	UC-5100	5	100	40	PZ3	82	80	-	
	UC-6030	6	30	-	PZ4	9	6	-	
	UC-6040	6	40	-	PZ4	19	16	-	
	UC-6045	6	45	-	PZ4	24	21	-	
	UC-6050	6	50	-	PZ4	29	26	120	
	UC-6060	6	60	-	PZ4	39	36	130	
	UC-6070	6	70	27	PZ4	49	46	140	
	UC-6080	6	80	20	PZ4	59	56	150	
	UC-6090	6	90	29	PZ4	69	66	160	
	UC-6100	6	100	40	PZ4	79	76	170	
	UC-6110	6	110	35	PZ4	89	86	240	
	UC-6120	6	120	47	PZ4	99	96	250	
Ø6	UC-6140	6	140	65	PZ4	119	116	270	
	UC-6160	6	160	90	PZ4	139	136	290	
	UC-6200	6	200	130	PZ4	179	176	-	
	Ø3	UCK-3012	3	12	-	PZ1	-	-	-
	Ø3.5	UCK-3545	3.5	45	-	PZ2	32	31	-
	Ø4.5	UCK-4525	4.5	25	-	PZ3	9	7	-
	Ø5	UCK-5020	5	20	-	PZ3	2	-	-
	Ø6	UCK-6030	6	30	-	PZ4	9	6	-
		UCK-6110	6	110	35	PZ4	89	86	240
	Ø4	UC-4080	4	80	9	PZ2	55	54	-
	Ø4.5	UC-4580	4.5	80	15	PZ3	54	52	-
	Ø5	UC-5120	5	120	40	PZ3	82	80	-
Ø6	UC-6130	6	130	47	PZ4	99	96	250	
	UC-6150	6	150	47	PZ4	99	96	250	
	UC-6180	6	180	47	PZ4	99	96	250	
Ø3	UCK-3016	3	16	-	PZ1	4	4	-	
	UCK-3020	3	20	-	PZ1	8	8	-	
	UCK-3030	3	30	-	PZ1	18	18	-	
	UCK-3040	3	40	-	PZ1	28	28	-	
Ø3.5	UCK-3516	3.5	16	-	PZ2	3	2	-	
	UCK-3520	3.5	20	-	PZ2	3	2	-	
	UCK-3530	3.5	30	-	PZ2	17	16	-	
	UCK-3535	3.5	35	-	PZ2	22	21	-	
	UCK-3540	3.5	40	-	PZ2	27	26	-	
	UCK-3550	3.5	50	-	PZ2	37	36	-	
Ø4	UCK-4016	4	16	-	PZ2	1	-	-	
	UCK-4020	4	20	-	PZ2	5	4	-	
	UCK-4035	4	35	-	PZ2	20	19	-	
	UCK-4040	4	40	-	PZ2	25	24	-	
	UCK-4045	4	45	-	PZ2	25	24	-	
	UCK-4050	4	50	-	PZ2	35	34	-	
	UCK-4060	4	60	-	PZ2	45	44	-	
Ø4.5	UCK-4070	4	70	9	PZ2	55	54	-	
	UCK-4520	4.5	20	-	PZ3	4	2	-	

Product information

Size	Product Code	Screw				Fixture		
		Diameter	Length	Zone without thread	Recess	Max. thickness		
		d	L	A	-	t _{fix} PVC profile	t _{fix} Timber	t _{fix} KCX with screw to wood
		[mm]	[mm]	[mm]	-	[mm]	[mm]	[mm]
Ø4.5	UCK-4530	4.5	30	-	PZ3	14	12	-
	UCK-4535	4.5	35	-	PZ3	19	17	-
	UCK-4540	4.5	40	-	PZ3	24	22	-
	UCK-4545	4.5	45	-	PZ3	29	27	-
	UCK-4550	4.5	50	-	PZ3	34	32	-
	UCK-4560	4.5	60	-	PZ3	44	42	-
	UCK-4570	4.5	70	15	PZ3	54	52	-
	UCK-4580	4.5	80	15	PZ3	54	52	-
Ø5	UCK-5025	5	25	-	PZ3	7	5	-
	UCK-5030	5	30	-	PZ3	12	10	-
	UCK-5035	5	35	-	PZ3	17	15	-
	UCK-5040	5	40	-	PZ3	22	20	-
	UCK-5045	5	45	-	PZ3	27	25	-
	UCK-5050	5	50	-	PZ3	32	30	70
	UCK-5060	5	60	-	PZ3	42	40	80
	UCK-5070	5	70	17	PZ3	52	50	90
	UCK-5080	5	80	20	PZ3	62	60	100
	UCK-5090	5	90	27	PZ3	72	70	110
	UCK-5100	5	100	40	PZ3	82	80	-
Ø6	UCK-6040	6	40	-	PZ4	19	16	-
	UCK-6050	6	50	-	PZ4	29	26	120
	UCK-6060	6	60	-	PZ4	39	36	130
	UCK-6070	6	70	27	PZ4	49	46	140
	UCK-6080	6	80	27	PZ4	49	46	140
	UCK-6100	6	100	40	PZ4	79	76	170
	UCK-6120	6	120	47	PZ4	99	96	250
	UCK-6130	6	130	65	PZ4	119	116	270
	UCK-6140	6	140	65	PZ4	119	116	270
	UCK-6160	6	160	90	PZ4	139	136	290
Ø3	UCK-3025	3	25	-	PZ1	-	-	-
	UCK-3035	3	35	-	PZ1	-	-	-
Ø3.5	UCK-3525	3.5	25	-	PZ2	32	31	-
Ø4	UCK-4025	4	25	-	PZ3	9	7	-
	UCK-4030	4	30	-	PZ3	9	7	-
Ø6	UCK-6090	6	90	-	PZ4	9	6	-

Installation data

Size			Ø2.5		Ø3		Ø3.5		Ø4		Ø4.5		Ø5		Ø6	
Substrate			Tim-ber	PVC profi-le	Tim-ber	PVC profi-le	Tim-ber	PVC profi-le	Tim-ber	PVC profi-le	Tim-ber	PVC profi-le	Tim-ber	PVC profi-le	Tim-ber	PVC profi-le
Min. installation depth	h _{nom}	[mm]	10	-	12	-	14	-	16	-	18	-	20	-	24	-
Min. substrate thickness	h _{min}	[mm]	20	3	24	3	28	3	32	3	36	3	40	3	48	3
Min. spacing	s _{min}	[mm]	30	30	30	30	30	30	30	30	30	30	30	30	30	30
Min. edge distance	c _{min}	[mm]	30	30	30	30	30	30	30	30	30	30	30	30	30	30

Basic performance data

Performance data for single screw without influence of edge distance and spacing

Size	ø2.5		ø3		ø3.5		ø4		ø4.5		ø5		ø6		
Substrate	PVC profile	Timber	PVC profile	Timber	PVC profile	Timber	Timber	PVC profile	PVC profile	Timber	PVC profile	Timber	PVC profile	Timber	
CHARACTERISTIC LOAD_{FK}															
UC	[kN]	0.30	0.95	0.60	0.90	0.70	1.10	1.35	0.75	0.75	2.20	0.80	2.25	0.90	3.05
DESIGN LOAD_{FD}															
UC	[kN]	0.15	0.30	0.30	0.30	0.35	0.35	0.45	0.35	0.35	0.70	0.40	0.75	0.45	1.00
RECOMMENDED LOAD_{FREC}															
UC	[kN]	0.11	0.21	0.21	0.21	0.25	0.25	0.32	0.25	0.25	0.50	0.29	0.54	0.32	0.71

Product commercial data

Product Code	Screw	Quantity [pcs]			Weight [kg]			Bar Codes
	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
UC-2508	8	1000.0	24000.0	-	0.37	8.9		5906675312125
UC-2510	10	1000.0	24000.0	768000.0	0.32	7.7	275.8	5906675312224
UC-2513	13	1000.0	24000.0	768000.0	0.32	7.7	275.8	5906675312323
UC-2516	16	1000.0	24000.0	768000.0	0.42	10.1	352.6	5906675312422
UC-3012	12	1000.0	32000.0	768000.0	0.46	14.6	379.4	5906675310220
UC-3016	16	1000.0	32000.0	768000.0	0.59	19.0	485.4	5906675310428
UC-3020	20	1000.0	32000.0	768000.0	0.67	21.5	546.9	5906675310527
UC-3025	25	1000.0	32000.0	768000.0	0.81	26.0	653.6	5906675310626
UC-3030	30	1000.0	24000.0	576000.0	0.93	22.3	564.0	5906675310725
UC-3035	35	1000.0	16000.0	384000.0	1.08	17.3	445.1	5906675310824
UC-3040	40	1000.0	16000.0	384000.0	1.28	20.4	520.0	5906675310923
UC-3512	12	1000.0	32000.0	768000.0	0.59	18.9	483.1	5906675311128
UC-3516	16	1000.0	32000.0	768000.0	0.73	23.3	588.3	5906675311227
UC-3520	20	1000.0	32000.0	768000.0	0.86	27.7	693.6	5906675311425
UC-3525	25	1000.0	24000.0	576000.0	1.12	26.9	675.1	5906675311524
UC-3530	30	1000.0	16000.0	384000.0	1.27	20.2	515.8	5906675311623
UC-3535	35	1000.0	16000.0	384000.0	1.45	23.2	587.6	5906675311722
UC-3540	40	1000.0	12000.0	288000.0	1.64	19.6	501.2	5906675311821
UC-3545	45	500.0	8000.0	192000.0	0.94	15.0	389.8	5906675311920
UC-3550	50	500.0	6000.0	144000.0	1.04	12.5	330.7	5906675312026
UC-4016	16	1000.0	16000.0	384000.0	0.96	15.3	397.5	5906675313221
UC-4020	20	1000.0	24000.0	576000.0	1.17	28.0	701.0	5906675313429
UC-4025	25	1000.0	16000.0	384000.0	1.42	22.7	575.3	5906675313528
UC-4030	30	500.0	8000.0	192000.0	0.83	13.2	347.2	5906675313627
UC-4035	35	500.0	12000.0	288000.0	0.93	22.4	567.4	5906675313726
UC-4040	40	500.0	8000.0	192000.0	1.06	17.0	438.6	5906675313825
UC-4045	45	500.0	8000.0	192000.0	1.18	18.8	482.0	5906675313924
UC-4050	50	500.0	6000.0	144000.0	1.31	15.8	408.4	5906675314020
UC-4060	60	500.0	6000.0	144000.0	1.50	18.0	462.6	5906675314129
UC-4070	70	250.0	3000.0	72000.0	0.91	10.9	290.9	5906675314228
UC-4520	20	500.0	9000.0	216000.0	0.82	14.8	385.6	5906675315126
UC-4525	25	500.0	9000.0	216000.0	0.99	17.8	457.3	5906675315225
UC-4530	30	500.0	12000.0	288000.0	1.04	24.9	627.9	5906675315324
UC-4535	35	500.0	8000.0	192000.0	1.25	19.9	508.1	5906675315423
UC-4540	40	500.0	8000.0	192000.0	1.48	23.6	596.8	5906675315522
UC-4545	45	250.0	6000.0	144000.0	0.75	18.1	464.3	5906675315621
UC-4550	50	250.0	4000.0	96000.0	0.87	14.0	365.6	5906675315720
UC-4560	60	250.0	4000.0	96000.0	1.00	16.0	413.6	5906675315829
UC-4570	70	250.0	3000.0	72000.0	1.20	14.4	375.6	5906675315928

Product commercial data

Product Code	Screw	Quantity [pcs]			Weight [kg]			Bar Codes
	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
UC-5020	20	500.0	16000.0	384000.0	1.02	32.6	813.4	5906675316123
UC-5025	25	500.0	12000.0	288000.0	1.11	26.7	669.9	5906675316222
UC-5030	30	500.0	8000.0	192000.0	1.33	21.3	542.3	5906675316321
UC-5035	35	500.0	8000.0	192000.0	1.52	24.3	612.1	5906675316420
UC-5040	40	250.0	4000.0	96000.0	0.84	13.5	353.7	5906675316529
UC-5045	45	250.0	6000.0	144000.0	0.97	23.4	590.4	5906675316628
UC-5050	50	200.0	3200.0	76800.0	0.89	14.2	369.8	5906675316727
UC-5060	60	200.0	2400.0	57600.0	1.03	12.3	325.2	5906675316826
UC-5070	70	200.0	2400.0	57600.0	1.17	14.1	367.2	5906675316925
UC-5080	80	100.0	1600.0	38400.0	0.67	10.7	286.5	5906675317021
UC-5090	90	100.0	2400.0	57600.0	0.71	17.0	437.8	5906675317120
UC-5100	100	100.0	1600.0	38400.0	0.84	13.5	353.7	5906675317229
UC-6030	30	200.0	6400.0	153600.0	0.82	26.4	662.8	5906675318127
UC-6040	40	200.0	4800.0	115200.0	1.06	25.5	642.9	5906675318325
UC-6045	45	200.0	3600.0	86400.0	1.16	20.9	531.1	5906675318424
UC-6050	50	200.0	3200.0	76800.0	1.28	20.5	522.7	5906675318523
UC-6060	60	200.0	2400.0	57600.0	1.50	18.0	462.3	5906675318622
UC-6070	70	100.0	2400.0	57600.0	0.86	20.7	527.1	5906675318721
UC-6080	80	100.0	2400.0	57600.0	0.98	23.5	594.5	5906675318820
UC-6090	90	100.0	1200.0	28800.0	1.08	13.0	341.0	5906675318929
UC-6100	100	100.0	1200.0	28800.0	1.20	14.4	375.6	5906675319025
UC-6110	110	100.0	1200.0	28800.0	1.31	15.8	408.1	5906675319124
UC-6120	120	100.0	1200.0	28800.0	1.42	17.1	439.2	5906675319223
UC-6140	140	100.0	1200.0	28800.0	1.64	19.7	502.0	5906675319421
UC-6160	160	100.0	1200.0	28800.0	1.87	22.4	567.4	5906675319520
UC-6200	200	100.0	800.0	19200.0	2.3	18.4	472.2	5906675319629
UCK-3012	12	10.0	10.0	-	10.3	10.3	770.2	5906675166261
UCK-3545	45	10.0	10.0	-	10.4	10.4	405.8	5906675166520
UCK-4525	25	10.0	10.0	-	10.1	10.1	515.9	5906675166780
UCK-5020	20	10.0	10.0	-	10.3	10.3	525.0	5906675167541
UCK-6030	30	10.0	10.0	-	10.1	10.1	756.1	5906675288376
UCK-6110	110	10.0	10.0	-	10.4	10.4	775.6	5906675291895
UC-4080	80	100.0	3200.0	76800.0	1.16	37.1	920.9	5906675314426
UC-4580	80	100.0	3200.0	76800.0	0.55	17.5	449.3	5906675315027
UC-5120	120	100.0	2400.0	57600.0	0.92	22.1	559.9	5906675317328
UC-6130	130	100.0	1200.0	28800.0	1.53	18.3	470.1	5906675319322
UC-6150	150	100.0	1200.0	28800.0	1.73	20.8	528.2	5906675319827
UC-6180	180	100.0	800.0	19200.0	2.1	16.8	433.2	5906675319728
UCK-3016	16	10.0	10.0	-	10.3	10.3	400.7	5906675166285
UCK-3020	20	-	-	-	10.0	10.0	510.0	5906675166308
UCK-3030	30	10.0	10.0	-	10.3	10.3	772.2	5906675166346
UCK-3040	40	10.0	10.0	-	10.3	10.3	774.6	5906675166384
UCK-3516	16	10.0	10.0	-	10.3	10.3	524.0	5906675166407
UCK-3520	20	10.0	10.0	-	10.3	10.3	523.4	5906675166421
UCK-3530	30	10.0	10.0	-	10.3	10.3	648.6	5906675166469
UCK-3535	35	10.0	10.0	-	10.3	10.3	526.2	5906675166483
UCK-3540	40	10.0	10.0	-	10.3	10.3	773.1	5906675166506
UCK-3550	50	10.0	10.0	-	10.4	10.4	404.2	5906675166544
UCK-4016	16	10.0	10.0	-	10.3	10.3	525.0	5906675166568
UCK-4020	20	10.0	10.0	-	10.3	10.3	772.2	5906675166582
UCK-4035	35	10.0	10.0	-	10.3	10.3	771.8	5906675166643
UCK-4040	40	10.0	10.0	-	10.3	10.3	525.4	5906675166667
UCK-4045	45	10.0	10.0	-	10.3	10.3	772.3	5906675166681
UCK-4050	50	10.0	10.0	-	10.3	10.3	772.9	5906675166704

Product commercial data

Product Code	Screw	Quantity [pcs]			Weight [kg]			Bar Codes
	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
UCK-4060	60	10.0	10.0	-	10.4	10.4	776.6	5906675166728
UCK-4070	70	10.0	10.0	-	10.3	10.3	401.6	5906675166742
UCK-4520	20	10.0	10.0	-	10.2	10.2	395.8	5906675166766
UCK-4530	30	10.0	10.0	-	11.4	11.4	849.6	5906675166803
UCK-4535	35	10.0	10.0	-	10.4	10.4	777.0	5906675020778
UCK-4540	40	10.0	10.0	-	10.4	10.4	778.6	5906675166827
UCK-4545	45	10.0	10.0	-	10.3	10.3	772.2	5906675166841
UCK-4550	50	10.0	10.0	-	10.4	10.4	531.0	5906675166865
UCK-4560	60	10.0	10.0	-	10.4	10.4	402.6	5906675166889
UCK-4570	70	10.0	10.0	-	10.3	10.3	774.8	5906675166902
UCK-4580	80	10.0	10.0	-	10.4	10.4	777.6	5906675014753
UCK-5025	25	10.0	10.0	-	10.4	10.4	485.9	5906675167565
UCK-5030	30	10.0	10.0	-	10.3	10.3	647.1	5906675167589
UCK-5035	35	10.0	10.0	-	10.4	10.4	527.5	5906675167602
UCK-5040	40	10.0	10.0	-	10.4	10.4	528.1	5906675167626
UCK-5045	45	10.0	10.0	-	10.3	10.3	524.7	5906675167640
UCK-5050	50	10.0	10.0	-	10.3	10.3	525.1	5906675167664
UCK-5060	60	10.0	10.0	-	10.4	10.4	528.7	5906675167688
UCK-5070	70	10.0	10.0	-	10.4	10.4	403.0	5906675167701
UCK-5080	80	10.0	10.0	-	10.4	10.4	403.0	5906675167725
UCK-5090	90	10.0	10.0	-	10.3	10.3	772.6	5906675015972
UCK-5100	100	10.0	10.0	-	10.4	10.4	402.9	5906675167749
UCK-6040	40	10.0	10.0	-	10.3	10.3	524.2	5906675167763
UCK-6050	50	10.0	10.0	-	10.3	10.3	771.4	5906675375366
UCK-6060	60	10.0	10.0	-	10.3	10.3	525.2	5906675167800
UCK-6070	70	10.0	10.0	-	10.4	10.4	527.8	5906675167824
UCK-6080	80	10.0	10.0	-	10.4	10.4	403.6	5906675167848
UCK-6100	100	10.0	10.0	-	10.4	10.4	403.8	5906675167886
UCK-6120	120	10.0	10.0	-	10.4	10.4	402.9	5906675167909
UCK-6130	130	10.0	10.0	-	10.4	10.4	775.0	5906675375373
UCK-6140	140	10.0	10.0	-	10.4	10.4	656.1	5906675001906
UCK-6160	160	10.0	10.0	-	10.4	10.4	403.2	5906675264066
UCK-3025	25	10.0	10.0	-	10.4	10.4	527.5	5906675166322
UCK-3035	35	10.0	10.0	-	10.4	10.4	775.6	5906675166360
UCK-3525	25	10.0	10.0	-	10.3	10.3	769.9	5906675166445
UCK-4025	25	10.0	10.0	-	10.3	10.3	771.2	5906675166605
UCK-4030	30	10.0	10.0	-	10.3	10.3	772.5	5906675166629
UCK-6090	90	10.0	10.0	-	10.4	10.4	526.7	5906675167862