


D-LP Strap ties

Strap ties for connecting of wood construction elements

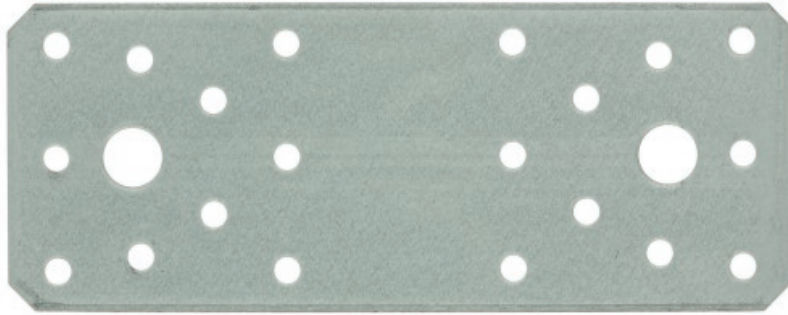

Product information

Features and benefits

- Connection of wooden construction elements
- Wider bores allow fastening using durable anchors
- Steel sheet thickness: 2.5 mm
- Zinc electroplated for enhanced corrosion resistance
- Anti-corrosion coating thickness min. 8µm

Applications

- Wooden constructions
- Wooden fences
- Wooden roof constructions
- Pergolas, bowers, sheds
- Versatile utility reinforcements

Base materials

Approved for use in:

- Timber





Also suitable for use in:

- Chipboard
- Plywood

Installation guide


1. Choose the right size of wood connector
2. Set the connector in required place and position
3. Fasten the connector using anchor nails or adequate screws

Product information

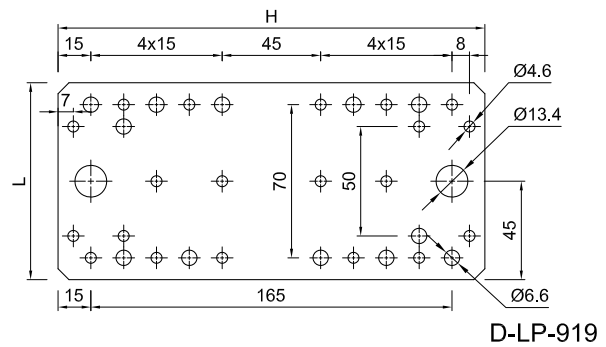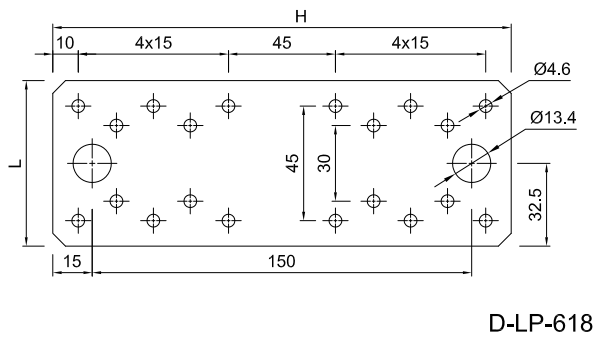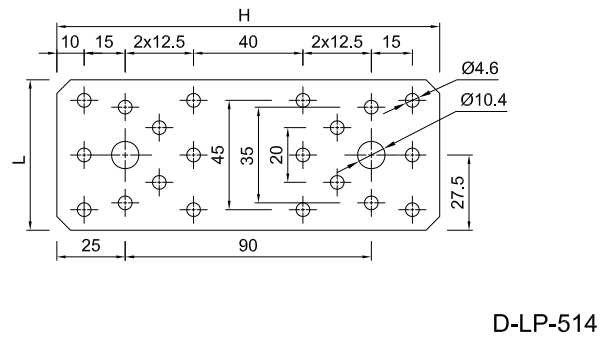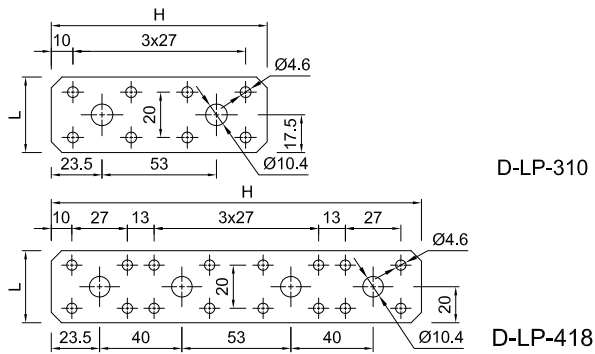

Product Code	Connector dimensions		Number of holes			
	Dimensions		Ø4.6	Ø6.6	Ø10.4	Ø13.4
	H	L				
[mm]						
D-LP-310	100	35	8	-	2	-
D-LP-418	180	40	16	-	4	-
D-LP-514	140	55	20	-	2	-
D-LP-618	180	65	20	-	-	2
D-LP-919	195	90	20	12	-	2

Basic performance data



Product Code	Load resistance		
	Characteristic	Design	Recommended
	[kN]	[kN]	[kN]
D-LP-310	3.50	1.10	0.80
D-LP-418	3.50	1.10	0.80
D-LP-514	3.70	1.20	0.90
D-LP-618	3.70	1.20	0.90
D-LP-919	3.70	1.20	0.90

Product commercial data

Product Code	Connector dimensions		Quantity [pcs]			Weight [kg]			Bar Codes
	Dimensions [mm]		Box	Outer	Pallet	Box	Outer	Pallet	
D-LP-310	100	35	100	100	12600	5.7	5.7	749.5	5906675432229
D-LP-418	180	40	50	50	3150	6.4	6.4	435.1	5906675432625
D-LP-514	140	55	50	50	4800	6.9	6.9	692.9	5906675432427
D-LP-618	180	65	30	30	1620	5.9	5.9	350.0	5906675432823
D-LP-919	195	90	30	30	1620	9.4	9.4	536.7	5906675432922